

PEAK 6

User manual &
Technical data



PIVIUK BEYOND
THE GLIDE

Raise *the bar*

WELCOME

We welcome you to our team and thank you for the trust you have placed in us by choosing a Niviuk paraglider.

We would like you to share the enthusiasm with which we have created this paraglider and the importance and care with which we have developed the design and manufacture of this new model. All this, in order to be able to offer you the maximum pleasure in every flight under a Niviuk paraglider.

Take a step further, whether for XC or competition flying, with this two-liner that will allow you to exceed your own limits. More performance, with an incredibly pleasant and efficient turn. The PEAK 6 is faster with outstanding handling.

The PEAK 6 will allow you to fly long distances with maximum comfort, safety, stability and accessibility.

We are confident you will enjoy flying this glider and will soon discover the meaning of our motto:

“The importance of small details to make great things happen”.

This is the user manual and we recommend you read it carefully.



CATEGORIES



CROSS-COUNTRY



COMPETITION

USER MANUAL

This manual provides you with the necessary information on the main characteristics of your new paraglider.

Whilst it provides information on the wing, it cannot be viewed as an instructional handbook and does not offer the training required to fly this type of paraglider. Training can only be undertaken at a certified paragliding school and each country has its own system of licensing.

Only the aeronautical authorities of respective countries can determine pilot competence.

The information in this manual is provided in order to warn you against adverse flying situations and potential dangers.

Equally, we would like to remind you that it is important to carefully read all the contents of your new PEAK 6 manual.

Misuse of this equipment could lead to severe injuries or death. The manufacturers and dealers cannot be held responsible for misuse of the paraglider. It is the responsibility of the pilot to ensure the equipment is used correctly.

01

CHARACTERISTICS	5
1.1 WHO IS IT DESIGNED FOR?	5
1.2 CERTIFICATION	5
1.3 IN-FLIGHT BEHAVIOR	5
1.4 TECHNOLOGIES, CONSTRUCTION, MATERIALS	6
1.5 ELEMENTS, COMPONENTS	6

02

UNPACKING AND ASSEMBLY	7
2.1 CHOOSING THE RIGHT LOCATION	7
2.2 PROCEDURE	7
2.3 CONNECTING THE HARNESS	7
2.4 HARNESS TYPE	7
2.5 SPEED-BAR	7
2.5.1 SPEED SYSTEM ASSEMBLY	8
2.5.2 CHANGING THE RISER CORDS	8
2.6 INSPECTION AND WING INFLATION ON THE GROUND	8
2.7 ADJUSTING THE BRAKES	8

03

THE FIRST FLIGHT	9
3.1 CHOOSING THE RIGHT LOCATION	9
3.2 PREPARATION	9
3.3 FLIGHT PLAN	9
3.4 PRE-FLIGHT CHECK	9
3.5 WING INFLATION, CONTROL AND TAKEOFF	9
3.6 LANDING	9
3.7 PACKING	9

04

IN FLIGHT	10
4.1 FLYING IN TURBULENCE	10
4.2 POSSIBLE CONFIGURATIONS	10
4.3 ACCELERATED FLIGHT	11
4.4 FLYING WITHOUT BRAKE LINES	11
4.5 LINE KNOT(S) IN FLIGHT	11

05

LOSING ALTITUDE	12
5.1 BIG EARS	12
5.2 B3 TECHNIQUE	12
5.3 B-LINE STALL	13
5.4 SPIRAL DIVE	13
5.5 SLOW DESCENT TECHNIQUE	13

06

SPECIAL METHODS	14
6.1 TOWING	14
6.2 ACROBATIC FLIGHT	14

07

CARE AND MAINTENANCE	15
7.1 MAINTENANCE	15
7.2 STORAGE	15
7.3 CHECKS AND INSPECTIONS	15
7.4 REPAIRS	15

08

SAFETY AND RESPONSABILITY	16
----------------------------------	-----------

09

GUARANTEE	16
------------------	-----------

10

ANNEXES	17
10.1 TECHNICAL SPECIFICATIONS	18
10.2 COLOURS	19
10.3 MATERIALS	20
10.4 LINE PLAN	21
10.5 RISER PLAN	22
10.6 LINE MEASUREMENTS BY SIZE	23
10.7 TOTAL LINE LENGTH	27
10.8 MINIMUM STRENGTH OF SUSPENSION LINES	29
10.9 MAILLON & PULLEY	30
10.10 CERTIFICATION	31

1. CHARACTERISTICS

1.1 WHO IS IT DESIGNED FOR?

Designed for cross-country flying and competition. A high performance wing designed to satisfy the most experienced pilots and high level competitors, but with surprising accessibility for a wing of its classification.

The PEAK 6 has more performance, with a very pleasant and efficient turn. The optimisation of the profile and of the internal load redistribution has resulted in a cleaner surface and improved glide, with a feeling of high safety in all phases of flight.

1.2 CERTIFICATION

The PEAK 6 has been submitted for the European EN and LTF certification. All certification tests were performed at the Swiss testing house Air Turquoise. All sizes passed the load, shock and flight tests.

The load test proved that the wing can withstand the stipulated 8G.

The shock test proved that the wing can resist 1000 daN of force.

The flight test resulted in the following certification of the PEAK 6 for all sizes (21, 22, 24 and 26):

EN D
LTF D

We recommend that only pilots who are familiar with gliders of this certification or above fly this paraglider.

Only the aeronautical authorities of respective countries can determine pilot competence.

We recommend pilots read the flight test report carefully, especially the comments of the test pilot. The report contains all the necessary information on how the paraglider reacts during each of the tested manoeuvres.

It is important to note that different size wings will react differently during manoeuvres. Even within the same size, at maximum or minimum load, the behaviour and reactions of the wing may vary.



Description of flight characteristics of LTF/EN D paragliders:

- Paragliders with demanding and unique flight characteristics with potentially violent reactions in turbulence and to pilot errors. Normal flight recovery requires precise pilot intervention.

Description of the pilot skills required for an EN D wing:

- For pilots trained in recovery techniques, who fly very actively, have significant experience of flying in turbulent conditions and who accept the consequences of flying with this type of wing.

For further information on the flight test and the corresponding certification, please see the final pages of this manual or see or visit the [Downloads section](#).

1.3 IN-FLIGHT BEHAVIOUR

Niviuk developed this wing by adopting very specific goals: to offer the best possible features, excellent handling, to make flying easier for the pilot.

Our other aims were to achieve optimal performance while maintaining the highest level of safety. To ensure that the wing transmits the maximum feedback in an understandable and comfortable way so that the pilot can focus on piloting and enjoying the flight. And, with active piloting, take advantage of all favourable conditions.

In all aspects of flight, the wing is very solid and stable. The glide is smooth, even when fully accelerated. During glides, the wing maintains altitude and the wing remains stable. Improved turn precision means

handling is less physical and provides better feedback. Inflating the wing is much easier and gentler, without overshooting.

Flying this wing is very intuitive, with clear and useful feedback about the airmass. It responds to the pilot's inputs effectively and even in thermic and turbulent conditions it remains stable and solid.

The PEAK 6 flies efficiently. It enters thermals with sufficient speed to centre in the lift and climbs progressively. The handling is progressive and effective for even more flying pleasure under an exciting wing of extraordinary quality.

It is lightweight; even lighter in flight and easy to pilot, with outstanding turbulence buffering and a surprising range of speed for incredible glides.

1.4 TECHNOLOGIES, CONSTRUCTION, MATERIALS

The PEAK 6 benefits from all the construction and assembly techniques used in our factory. It has all the current technology and accessories available to improve pilot comfort whilst increasing safety and performance.

In the design of all Niviuk products the team aims to ensure development and continuous improvement. The technologies developed in recent years have allowed us to develop greater, better wings. It is in this context that we would like to introduce the technologies included in this new model:

RAM Air Intake - The system is characterised by the arrangement of the air inlets, to ensure optimal maintenance of internal pressure across the the whole range of angles of attack.

The result? Having greater internal pressure means better tolerance of turbulence, greater consistency of the profile shape across the speed range; excellent handling at low speed is achieved by allowing the pilot to extend the braking limit, there is a lower risk of collapse and consequently, greater control and safety.

TNT Titanium Technology - a revolutionary technique using titanium. Using Nitinol in the internal construction provides a more uniform profile and reduces the weight to gain efficiency in flight. Nitinol provides the highest level of protection against deformation, heat or breaks.

Nitinol now features in all our wings.

SLE Structured Leading Edge - SLE is the application of Nitinol rods in the leading edge. This technology provides increased strength and

stability by maintaining the shape of the aerofoil throughout all phases of flight. This increases performance, efficiency and stability, absorbs turbulence better and makes the wing much more durable over time.

3DP Pattern Cut Optimization - this involves placing the fabric of each panel in one direction only, taking as a reference its location on the leading edge. It has been proved that, if the cloth pattern is correctly aligned to the direction of the load axes, the material deforms much less flight after flight, so the leading edge keeps its shape better and is much more durable over time.

Over the years, the design of our paragliding and paramotoring wings has evolved a lot, with a positive and specific advancement of the leading edge.

3DL 3D Leading Edge - this means adjusting the material of the leading edge to avoid ballooning and the creases that form in this curved area of the wing. Specifically, the leading edge is divided into "sub-panels" sewn into each of the cells at the front of the glider. As a result, the tension of the leading edge cloth is perfectly uniform, increasing the performance and durability of the glider.

STE Structured Trailing Edge - the application of Nitinol rods in the trailing edge makes up the STE. Thanks to this technology, the shape of the profile is maintained, especially at high speeds, the load distribution and strength are improved, reducing creases and drag while increasing the performance of the sail.

DRS Drag Reduction Structure - the DRS aims to reduce the adverse pressure gradient and drag by optimising the aerodynamic shape of the wing. Its application makes the airflow direction much more progressive at the trailing edge. This increases performance without reducing safety and control of the wing.

RSD Radical Sliced Diagonal - this involves a redesign of the internal structure of the wing. It incorporates independent and efficiently oriented diagonals, i.e. following the direction of the cloth. This improves strength, reduces the overall weight of the glider and avoids deformation.

In order to improve stress distribution and reduce the number of attachment points and lines, most wings already have these diagonals, which are connected from the attachment points to the adjacent profiles.

The use of these technologies is a big technological leap forward in building wings and a big improvement in flight comfort.

For the construction process of the PEAK 6 we use the same criteria, quality controls and manufacturing processes as in the rest of our range. From Olivier Nef's computer to fabric cutting, the operation does not allow for even a millimetre of error. The cutting of each wing component is performed by a rigorous, extremely meticulous, automated computer laser-cutting robotic arm.

This program also paints the guideline markers and numbers on each individual fabric piece, thus avoiding errors during this delicate process.

The jigsaw puzzle assembly is made easier using this method and optimises the operation while making the quality control more efficient.

All Niviuk gliders go through an extremely thorough and detailed final inspection. The canopy is cut and assembled under strict quality control conditions facilitated by the automation of this process.

Every wing is individually checked with a final visual inspection. The fabric used to manufacture the glider is light, resistant and durable. The fabric will not experience fading and is covered by our warranty.

The lines are made from unsheathed Aramid and Dyneema.

The line diameter has been calculated depending on the workload and aims to achieve the required best performance with the least drag.

The lines are semi-automatically cut to length and all the sewing is completed under the supervision of our specialists.

Every line is checked and measured once the final assembly is concluded.

Each glider is packed following specific maintenance instructions as recommended by the fabric manufacturer.

Niviuk gliders are made of premium materials that meet the requirements of performance, durability and certification that the current market demands.

Information about the various materials used to manufacture the wing can be viewed in the final pages of this manual.

1.5 ELEMENTS, COMPONENTS

The PEAK 6 is delivered with a series of accessories that will greatly assist you in the maintenance of your paraglider:

- An NKare Bag to protect the wing during storage and transport.
- A repair kit with self-adhesive Ripstop tape and spare parts to protect the maillons.
- The PEAK 6 is delivered with Niviuk's Ergo handle, which allows the pilot more comfortable, ergonomic and efficient control thanks to direct steering on the B-risers.
- A Kargo bag - this is not included in the scope of the delivery, but its purchase is recommended. It facilitates transport of all the equipment comfortably and with plenty of space.

2. UNPACKING AND ASSEMBLY

2.1 CHOOSING THE RIGHT LOCATION

We recommend unpacking and assembling the wing on a training hill or a flat clear area without too much wind and free of obstacles. It will help you to carry out all the recommended steps required to check and inflate the PEAK 6.

We recommend the whole installation procedure is supervised by a qualified professional instructor or official dealer. Only they can address any doubts in a safe and professional way.

2.2 PROCEDURE

Take the paraglider out of the rucksack, open and unfold it on the ground with the lines positioned on the undersurface, oriented in the direction of inflation. Check the condition of the fabric and the lines for defects. Check the maillons/IKS connecting the lines to the risers to make sure they are fully closed and tightened. Identify, and if necessary, untangle, the A and B-lines, the brake lines and corresponding risers. Make sure that there are no knots.

2.3 CONNECTING THE HARNESS

The PEAK 6 risers are colour-coded.

- Right: green
- Left: red



This colour-coding makes it easier to connect the wing to the correct side and helps prevent pre-flight errors.

Correctly connect the risers to the attachment points so that the risers and lines are correctly ordered and free of twists. Check that the IKS and carabiners are properly fastened and securely locked.

! PLEASE NOTE: The PEAK 6 uses risers of different lengths. Size 21 uses risers with different differentials. For all other sizes, the risers are the same and interchangeable, but NOT for size 21.

2.4 HARNESS TYPE

The PEAK 6 can be flown with all current harness types. However, a harness with a pod is recommended as the wing is designed for flying with this type of harness. If the harness features an adjustable chest strap, we recommend setting this to the distance specified in the certification report - this will vary depending on size. See the certification certificate.

Care should be taken with the chest strap setting, as the distance of the chest strap setting will affect the handling of the glider. If the chest strap is too wide, it allows greater feedback but this carries the risk of affecting the stability of the wing.

If the chest strap is set too tightly, the wing feels more solid, but there is a loss of feedback and a risk of twisting in the case of a violent asymmetric collapse.

2.5 SPEED-BAR

The speed-bar is a means of temporary acceleration by changing the flow over the profile. The speed system comes pre-installed on the risers and is not modifiable as it conforms to the measurements and limits stipulated in its certification.

The PEAK 6 includes a speed system with maximum travel depending on its size (see Full speed-bar).

The speed system is engaged when the pilot pushes the speed-bar (not included as standard with this glider model) with their feet (see 2.5.1 Speed system assembly)

The speed system uses an action/reaction system. Released, the speed-bar is set to neutral. When the bar is pushed using the feet, the wing accelerates. The speed can be regulated by varying the pressure on the bar. Once the pressure on the bar is released, the speed system returns to the neutral setting.

The speed system is efficient, sensitive and precise. The pilot can use the system whenever they want during the flight. In the neutral position the glider will fly at the standard speed and glide. Using full speed-bar, the wing will fly at maximum speed, but the glide will be adversely affected.

- Released speed-bar: the A and B-risers are aligned.
- Full speed-bar: the difference between the A and B-risers becomes:

Size 21 – 14 cm
 Sizes 22, 24 and 26 = 15,5 cm

! PLEASE NOTE: The use of the speed system results in changes to the speed and reactions of the wing. For more information, please see the certification report.

2.5.1 SPEED SYSTEM ASSEMBLY

The speed-bar consists of the bar that the pilot pushes with their feet, as well as the two cords that connect it to the speed system components on the risers. Once you have chosen the type of speed-bar you prefer, you must install it. Some considerations:

- You should use the type of speed-bar you consider appropriate, depending on the type of harness, personal preferences, etc.
- The speed-bar is detachable to facilitate its connection and / or disconnection to the risers as well as subsequent adjustment.
- To connect it to the harness, please follow the instructions of the harness manufacturer. The majority of harnesses have a speed system pre-installed.
- The standard connection of the speed-bar to the speed system is via Brummel hooks, where two slots in the hooks are interlocked, making their connection/disconnection easy. However, any connection system that is safe may be used.

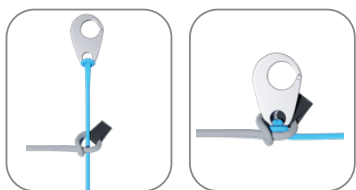


Diagram 1. Speed-bar connection by means of the Brummel hook passage.

2.5.2 CHANGING THE RISER CORDS

In spite of the speed system having pulleys with bearings to reduce friction to a minimum, the frequency with which the speed-bar is used causes the cord to wear and you may need to replace them.

In all Niviuk gliders the speed system cords on the risers are completely removable and easily replaceable. You can use the Brummel hooks, not use them, remove them, use another type of connector, etc. It is even possible to fix the speed-bar cords directly to the speed system on the risers. This last option makes the connection / disconnection more laborious, but means the cord has maximum travel without obstructions or restrictions which is very useful for some models of harnesses.

2.6 INSPECTION AND WING INFLATION ON THE GROUND

After your gear has been thoroughly checked and the weather conditions deemed favourable for flying, inflate your PEAK 6 as many times as necessary to familiarise yourself with its behaviour. Inflating the PEAK 6 is easy and should not require a great deal of physical effort. Inflate the wing with a little pressure from the body using the harness. This may be assisted by using the A-lines. Do not pull on them; just accompany the natural rising movement of the wing. Once the wing is inflated to the overhead position, appropriate control with the brakes will be sufficient to hold it there.

2.7 ADJUSTING THE BRAKES

The length of the main brake lines are adjusted at the factory and conform to the length stipulated during certification. However, they can be changed to suit your flying style. It is advisable to fly with the original setting for a period of time to get used to the actual behaviour of the PEAK 6. In case it is necessary to modify the brake length, loosen the knot, slide the line through the brake handle to the desired point and re-tighten the knot firmly. Only qualified personnel should carry out this adjustment. You must ensure that the modification does not affect the trailing edge and slow the glider down without pilot input. Both brake lines should be symmetrical and the same length. We recommend using a clove hitch or bowline knot.

When changing the brake length, it is necessary to check that they do not engage when the speed-bar is used. When we accelerate, the glider rotates over the B-riser and the trailing edge elevates. It is important to check that the brake is adjusted to take into consideration this extra distance during acceleration. With this profile deformation there is a risk of generating turbulence and causing a frontal or asymmetric collapse.



3. THE FIRST FLIGHT

3.1 CHOOSING THE RIGHT LOCATION

For the first flight we recommend going to your usual flying area and that a qualified instructor is present and supervising the entire procedure.

3.2 PREPARATION

Repeat the procedures detailed in section 2 UNPACKING AND ASSEMBLY to prepare your equipment.

3.3 FLIGHT PLAN

Planning a flight before taking off to avoid possible problems later is always a good idea.

3.4 PRE-FLIGHT CHECK

Once ready, but before taking off, conduct another equipment inspection. Conduct a thorough visual check of your gear with the wing fully open, the lines untangled and properly laid out on the ground to ensure that all is in working order. Be certain the weather conditions are suited to your flying skill level.

3.5 WING INFLATION, CONTROL AND TAKEOFF

For launch, a smooth and progressive inflation is recommended. The PEAK 6 is easy to inflate and does not require a great deal of physical effort. It has no tendency to overshoot, which allows a smooth inflation phase, giving way to a control phase with enough time to make the decision to accelerate and take off when the pilot wishes to do so.

If the wind permits, we recommend a reverse launch, as this allows a better visual inspection of the wing during inflation. In “strong” winds, the PEAK 6 is especially easy to control using this launch technique. Winds of 25 to 30 km/h are considered strong for paragliding.

Correctly setting up the wing on the ground before takeoff is especially important. Choose an appropriate location facing the wind. Position the paraglider in a crescent configuration to facilitate inflation. A clean wing layout will ensure a trouble-free take off.

3.6 LANDING

The PEAK 6 lands excellently, it converts the wing speed into lift at your demand, allowing an enormous margin of error. Wrapping the brake lines around your hand to get greater braking efficiency is not necessary.

3.7 PACKING

The PEAK 6 has a complex leading edge, manufactured using a variety of different materials and it must be packed carefully. A correct folding method is very important to extend the useful life of your paraglider.

It should be concertina-packed, with the leading edge reinforcements flat and the flexible rods stacked one on top of the other. This method will keep the profile in its original shape and protect the integrity of the wing over time. Make sure the reinforcements are not bent or folded. It should not be folded too tightly to avoid damage to the cloth and/or lines.

Niviuk have designed the NKare Bag. This will assist you in quickly folding the paraglider, keeping the profile and integrity of the internal structures in perfect condition.

The NKare Bag will guide you through the folding process by allowing you to place the rods one on top of the other on the longitudinal axis to “concertina” pack the glider. Then you can easily make the sectional folds that each model requires. This folding system guarantees that both the cloth and the reinforcements of the internal structure remain in perfect condition.



4. IN FLIGHT

We recommend that you read the certification test report.

The report contains all the necessary information on the PEAK 6 reacts during each of the tested manoeuvres.

It is important to point out that the appropriate response to each adverse manoeuvre can vary from size to size; even within the same size at maximum or minimum load the behaviour and reactions of the wing may vary.

Having the knowledge that the testing house provides through the test report is fundamental to learning how to deal with possible situations.

To become familiar with the manoeuvres described below, we recommend practising within the auspices of a licensed training outfit.

4.1 FLYING IN TURBULENCE

The PEAK 6 has an excellent profile to deal with incidents; it is very stable in all conditions and has a high degree of passive safety, even in turbulent conditions.

All paragliders must be piloted for the prevailing conditions and the pilot is the ultimate safety factor.

We recommend active flying in turbulent conditions, always taking measures to maintain control of the wing, preventing it from collapsing and restoring the speed required by the wing after each correction.

Do not correct the glider (braking) for too long in case this provokes a stall. If you have to take corrective action, make the input then re-establish the correct flying speed.

4.2 POSSIBLE CONFIGURATIONS

To become familiar with the manoeuvres described below, we recommend practising within the environment of a licensed training outfit. You must adapt your use of the brakes depending on the wing-loading and avoid over-steering.

It is important to note that the type of reaction to a manoeuvre can vary from one size of wing to another, and even within the same size the behaviour and reactions may be different depending on the wing-loading.

In the test report, you will find all the necessary information on how to handle your new wing during each of the tested manoeuvres. Having this information is crucial to know how to react during these manoeuvres in real flight, so you can deal with these situations as safely as possible.

Asymmetric collapse


In spite of the PEAK 6's profile stability, strong turbulent air may cause the wing to collapse asymmetrically in very strong turbulence, especially if you do not fly actively and prevent the collapse. In this case the glider conveys a loss of pressure through the brake lines and the harness. To prevent the collapse from happening, pull the brake handle on the affected side of the wing. It will increase the incidence of the wing (angle of attack). If the collapse does happen, the PEAK 6 will not react violently, the turning tendency is gradual and easily controlled. Weight-shift toward the open, flying side (the opposite side of the collapse) to keep the wing flying straight, while applying light brake pressure to that side if necessary. Normally, the collapsed side of the wing should then recover and reopen by itself. If it does not, try to weight-shift towards the collapsed side. If this does not resolve the issue, pull the brake handle on the collapsed side decisively and quickly all the way (100%) down and release it back up immediately. You may have to repeat this action to provoke the re-opening of the collapsed glider side. Do not over-brake or slow down the flying side of the wing (control the turn). Once the collapsed side is open make sure you return to normal flying speed.

Frontal collapse

Due to the PEAK 6's design, in normal flying conditions frontal collapses are unlikely to take place. The wing's profile has great buffering abilities when dealing with extreme incidence changes. A frontal collapse may occur in strong turbulent conditions, entering or exiting powerful thermals. Frontal collapses usually re-inflate without the glider turning, but a symmetrically applied quick braking action with a quick deep pump of both brakes will accelerate the re-inflation if necessary. Release the brake lines immediately to return to default glider air speed.

Negative spin

A negative spin does not conform to the PEAK 6's normal flight behaviour. Certain circumstances however, may provoke a negative spin (such as trying to turn when flying at very low air speed whilst applying a lot of brake). It is not easy to give any specific recommendation about this situation other than quickly restoring the wing's default air speed

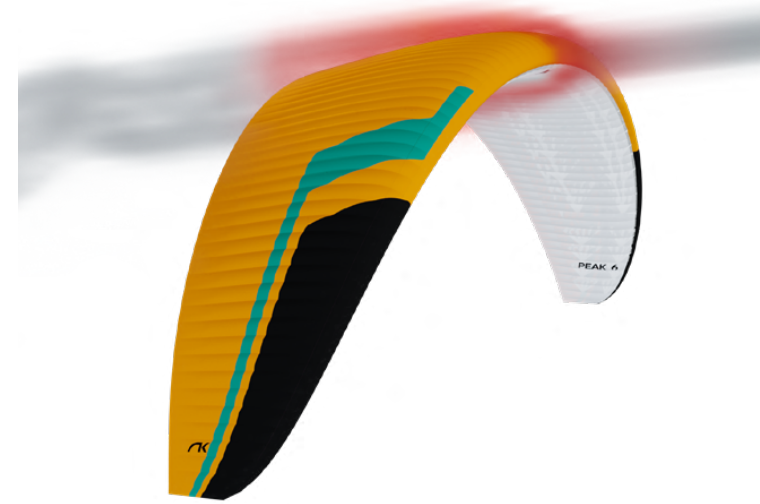

and angle of attack by progressively reducing the tension on the brake lines. The normal wing reaction will be to have a lateral surge on the re-accelerated side with a rotation not greater than 360° before returning to default air speed and a straight flight path trajectory.

Parachutal stall

The possibility of entering or remaining in a parachutal stall have been eliminated from the PEAK 6.

A parachutal stall is virtually impossible with this wing. If it did enter into a parachutal stall, the wing loses forward motion, becomes unstable and there is a lack of pressure on the brake lines, although the canopy appears to be fully inflated. To regain normal air speed, release brake line tension symmetrically and manually push on the A-lines or weight-shift your body to any side WITHOUT PULLING ON THE BRAKE LINES.

Deep Stall

The possibility of the PEAK 6 stalling during normal flight is very unlikely. It could only happen if you are flying at a very low air speed, whilst over-steering or performing dangerous manoeuvres in turbulent air.

To provoke a deep stall, the wing has to be slowed down to its minimum air speed by symmetrically pulling the brake lines all the way (100%)

down until the stall point is reached and held there. The glider will first pitch rearward and then reposition itself overhead, rocking slightly, depending on how the manoeuvre is done.

When entering a stall, remain clear-headed and ease off the brake lines until reaching the half-way point of the total brake travel. The wing will then surge violently forward and could reach a point below you. It is most important to maintain brake pressure until the glider has returned to its default overhead flying position.

To resume normal flight conditions, progressively and symmetrically release the brake line tension to regain air speed. When the wing reaches the overhead position, the brakes must be fully released. The wing will then surge forward to regain full air speed. Do not brake excessively at this moment as the wing needs to accelerate to pull away from the stall configuration. If you have to control a possible frontal collapse, briefly pull both brake handles down to bring the wing back up and release them immediately while the glider is still in transition to reposition itself overhead.

Cravat

A cravat may happen after an asymmetric collapse, when the end of the wing is trapped between the lines. Depending on the nature of the tangle, this situation could rapidly cause the wing to spin. The corrective manoeuvres to use are the same as those applied in case of an asymmetric collapse: control the turn/spin by applying tension on the opposite brake and weight shift opposite to the turn. Then locate the stabilo line (attached to the wing tip) trapped between the other lines. This line has a different colour and is located on the outside position of the A-riser.

Pull this line until it is taut. This action will help to release the cravat. If ineffective, fly down to the nearest possible landing spot, controlling the direction with both weight-shift and the use of the brake opposite to the tangled side. Be cautious when attempting to undo a tangle while flying near terrain or other paragliders; it may not be possible to continue on the intended flight path.

Over-controlling

Most flying problems are caused by wrong pilot input, which then escalates into a cascade of unwanted and unpredicted incidents. We should note that the wrong inputs can lead to loss of control of the glider. The PEAK 6 was designed to recover by itself in most cases. Do not try to over-correct it!

Generally speaking, the reactions of the wing, which are caused by too much input, are due to the length of time the pilot continues to over-control the wing. You have to allow the glider to re-establish normal flying speed and attitude after any type of incident.

4.3 ACCELERATED FLIGHT

The PEAK 6's profile was designed for stable flight throughout its entire speed range. The speed-bar can be used in strong winds or significant sink.

When accelerating the wing, the profile becomes more sensitive to turbulence and closer to a possible frontal collapse. If a loss in internal wing pressure is felt, tension on the speed-bar should be reduced to a minimum and a slight pull on the brake lines is recommended to increase the wing's incidence angle. Remember to re-establish the air speed after correcting the angle of attack.

It is NOT recommended to accelerate near obstacles or in very turbulent conditions. If necessary, constantly adjust the movements and pressure on the speed-bar whilst doing the same to the brake lines. This balance is considered to be 'active piloting'.

4.4 FLYING WITHOUT BRAKE LINES

If, for any reason at all, the PEAK 6's brake lines become disabled in flight, it will become necessary to pilot the wing gently using the B-risers and weight shifting until landing. These risers steer easily because are not under significant tension. You will have to be careful and not handle them too heavily in case this causes a stall or negative spin. The wing must be flown at full speed (not accelerated) during the landing approach, and the B-risers should be pulled symmetrically shortly before contact with the ground. This braking method is not as effective as using the brake lines, and hence the wing will land with a higher ground speed.

4.5 LINE KNOT(S) IN FLIGHT

The best way to avoid knots and tangles is to thoroughly inspect the lines as part of a systematic pre-flight check. If a knot is spotted during the take off phase, immediately abort the launch sequence and stop.

If inadvertently taking off with a knotted line, the glider drift will need to be compensated by weight-shifting to the opposite side and applying a slight brake pull to that side. Gently pull the brake line to see if the knot can be undone or try to locate the problem line. Try pulling it to see if the knot can be undone. Beware of trying to clear a knotted line or

untangle a line in flight when close to the terrain. If the knot is too tight and cannot be undone, carefully and safely fly to the nearest landing zone. Be careful: do not pull too hard on the brake handles because there will be an increased risk of stalling the wing or entering a negative spin. Before attempting to clear a knot, make sure there are no other pilots flying in the vicinity.



5. LOSING ALTITUDE

Knowledge of different descent techniques could become vital in certain situations. The most suitable descent method will depend on the particular situation.

To become familiar with the manoeuvres described below, we recommend practising within the environment of a licensed training outfit.

5.1 BIG EARS

“Big Ears” is a moderate descent technique, able to increase the sink rate to -3 or -4 m/s and reduces the ground speed by 3 to 5 km/h. The angle of attack and effective wing-loading will also increase due to the smaller surface area of the wing.

To perform the Big Ears manoeuvre, take the A' line on each A-riser and simultaneously, smoothly pull them outward and downward. The wingtips will fold in. To re-establish forward speed and the correct angle of attack, accelerate once the ears are pulled.

Keep the ears pulled in until you have lost the desired altitude. Let go of the lines to re-inflate the tips automatically. If they do not, try progressively pulling one brake then the other. Asymmetric reopening is recommended in order to avoid compromising the angle of attack, particularly flying near the ground or in turbulent conditions.

Beware of the risk of stalling!

The action of reaching for the “3a3” line to make ears, can inadvertently mean pulling the brakes. The same can happen when we are holding the tips down with the “3a3” line, it is possible to accidentally affect the brakes. This can obviously lead to a significant speed decrease.

In paragliders with a very pronounced arc, pulling big ears means an increase in drag. On a very arched wing, the ears do not fold, they just hang. The increase of drag is more pronounced than on wings with a less pronounced arc.

The PEAK 6 is designed with little chord, which is good in normal flight conditions. However, this same damping is what can cause us to have problems to regain normal flying speed after a high increase of the angle of attack and the added drag of the ears.

These particularities, together with turbulent thermic conditions, could cause an unintentional stall.

The solution: Big Ears may still be applied but you must be fully aware of the above-mentioned points and act accordingly. To avoid the stall, simply use half speed-bar (this is sufficient) to increase the speed and decrease the angle of incidence. This should allow you to maintain sufficient speed to prevent the stall. Take care not to pull the brakes while making the ears as this will make a stall more likely!

5.2 B3 TECHNIQUE

Even though you can use the classic ears technique, it causes great turbulences on the trailing edge. Moreover, using ears on wings with a high aspect ratio tends to “flap”, increasing these turbulences. It brings a speed loss that needs to be recovered by using the speed bar or releasing ears.

In 2009, the Niviuk Team pilots created a new manoeuvre for rapid descent – the B3 technique, which is performed with the 3C3 line. It was

during the testing of a competition prototype that its characteristics (high aspect ratio and a new line distribution) did not allow Big Ears to be performed.

Some current two or three-liners are not very well suited to Big Ears because the risk is too high. Many advanced pilots want to have a fast and controlled descent technique, and this is when this new manoeuvre comes into play. For this reason, we recommend using the 3c3 line.

The B3 technique quickly increases the descent rate without causing the disadvantages described above. There is also no risk of stalling, as the descent takes place at a high speed at all times.

To perform this manoeuvre, locate the 3c3 line and do the same movement as you would do to make the ears: “pull” the line until the wingtips retract. At this point the glider will start to slow down and the wingtips will hang back. Then the speed will be increased slightly until it is stable again and a sink rate of 5 to 6 m/s will be achieved.

We advise you to use your speed-bar whenever you use this technique. You can control the direction by turning using weight-shift. At the first



you will notice a decrease in the relative wind and a slight tilt towards the back of the sail, as if you were going backwards.

To exit the manoeuvre, let go of the lines as you would with Big Ears and you will feel the glider gently returning to its normal rate of descent.

The B3 Technique allows you to descend quickly without the risk of a cravat. It is very comfortable and offers a lot of ease in turns.

⚠ PLEASE NOTE: we recommend practising this manoeuvre for the first time in gentle conditions and with sufficient height. It is a safe and controlled descent technique, which only needs a little training to be performed comfortably and efficiently.

5.3 B-LINE STALL

It is not possible to use this descent technique with the PEAK 6.

5.4 SPIRAL DIVE


This is a more effective way to rapidly lose altitude. Beware that the wing will experience and be subjected to a tremendous amount of descending and rotating speed (g-force), which can cause a loss of orientation and consciousness (blackout). This manoeuvre must therefore be done gradually to increase one's capacity to resist the g-force exerted on the body. With practise, you will fully appreciate and understand it. Only practise this manoeuvre at high altitude and with enough ground clearance.

To start the manoeuvre, first weight shift and pull the brake handle located on the inner side of the turn. The intensity of the turn can be controlled by braking slightly using the outer brake handle.

A paraglider flying at its maximum rotating speed can reach -20 m/s, or the equivalent of a 70 km/h vertical descent, and will stabilise in a spiral dive from 15m/s onwards.

Good enough reasons to familiarise yourself with the manoeuvre and understand how to exit it.

To exit this manoeuvre, the inner brake handle (down side of the turn) must progressively be relaxed while momentarily applying tension to the outer brake handle opposite to the turn. The pilot must also weight shift and lean towards the opposite side of the turn at the same time.

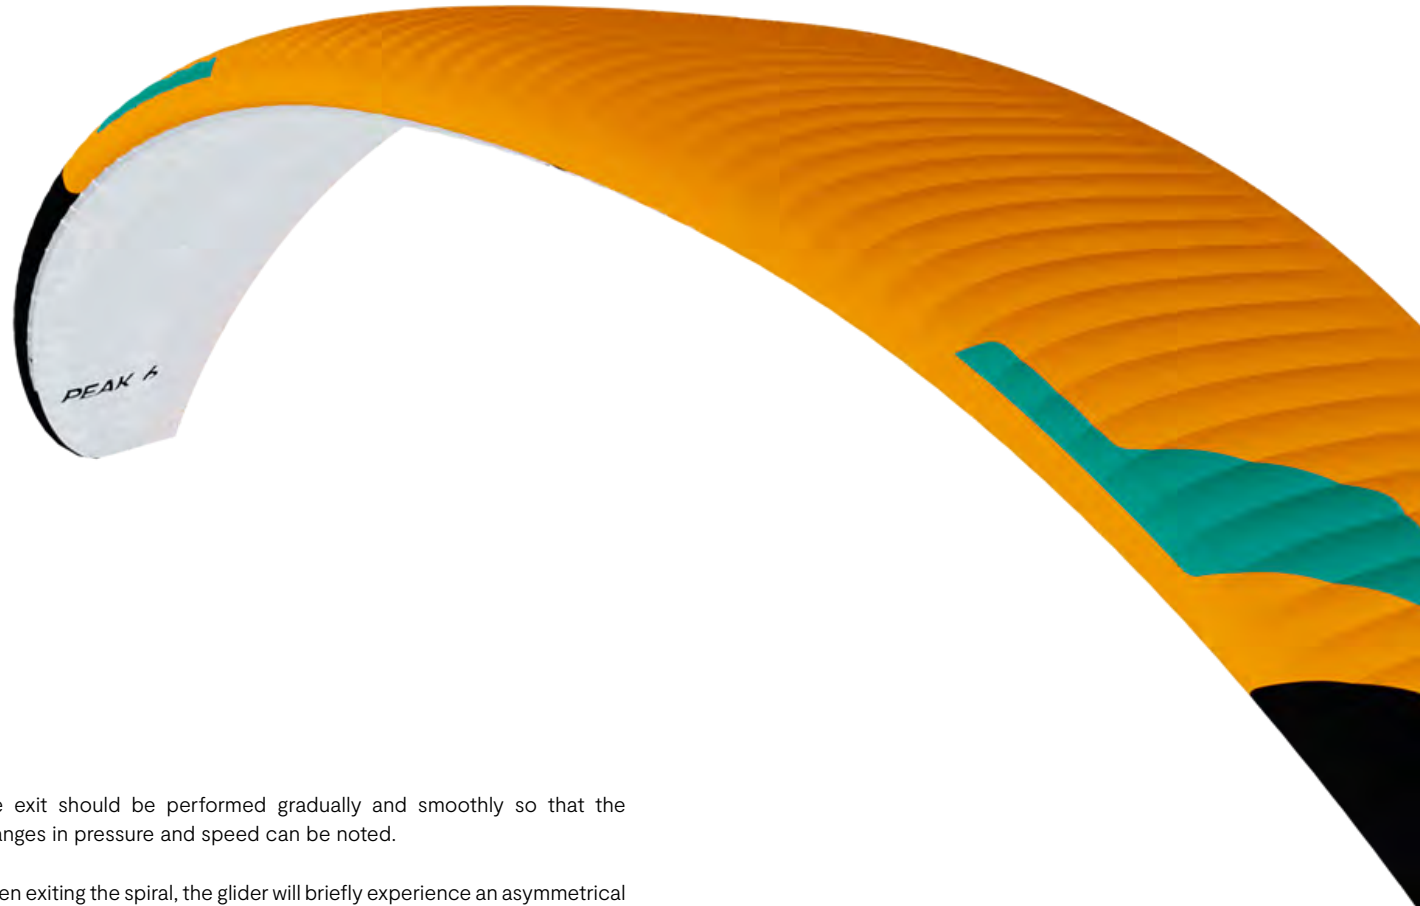

The exit should be performed gradually and smoothly so that the changes in pressure and speed can be noted.

When exiting the spiral, the glider will briefly experience an asymmetrical acceleration and dive, depending on how the manoeuvre was carried out.

Practise these manoeuvres at sufficient altitude and carefully.

5.5 SLOW DESCENT TECHNIQUE

This technique allows descent without straining the wing or taxing the pilot. Glide normally while searching for descending air and begin to turn as if climbing in a thermal, but with the intention to sink.

Common sense has to be used to avoid dangerous areas of rotor when looking for descending air. Safety first!

6. SPECIAL METHODS

6.1 TOWING

The PEAK 6 does not experience any problem whilst being towed. Only qualified winch personnel should handle the certified equipment to carry out this operation. The wing must be inflated similarly as during a normal take off.

It is important to use the brakes to correct the flight path alignment, especially in the first phase of the tow. Since the wing is subject to a slow airspeed and with a high positive angle of attack, we must make any corrections with a high degree of feel and delicacy, in order to avoid a stall.

6.2 ACROBATIC FLIGHT

Although the PEAK 6 was tested by expert acrobatic pilots in extreme situations, it was not designed for it. We do not recommend using this glider for acrobatic flying!!!

We consider acrobatic flights to be any form of piloting different than standard flights. Learning acrobatic manoeuvres should be conducted under the supervision of qualified instructors within a school environment and over water with all safety/rescue elements in place. Centrifugal forces as high as 4 to 5 g can be exerted on the body and wing during extreme manoeuvres.



7. CARE AND MAINTENANCE


7.1 MAINTENANCE

Careful maintenance of your equipment will ensure continued top performance. Apart from the general checks, we recommend actively maintaining your equipment.

A pre-flight check is obligatory before each flight.

If there is any damage to the equipment or you suspect any areas of the wing are susceptible to wear, you should inspect these and act accordingly.

Niviuk we are firmly committed to make technology accessible to all pilots. Therefore, our wings are equipped with the latest technological advances gained from the experience of our R&D team. Thanks to these new technologies, paragliders are gaining more safety and performance, which requires greater care of the materials.

 **IMPORTANT:** it is critical to avoid any kind of impact or dragging the leading edge on the ground. This part is reinforced with very durable and strong Nitinol rods that can be easily replaced. Dragging and/or hitting the leading edge can cause serious damage to the fabric, which is much more complicated and costly to repair.

The fabric and the lines do not need to be washed. If they become dirty, clean them with a soft damp cloth, using only water. Do not use detergents or other chemicals.

If your wing is wet from contact with water, place it in a dry area, air it and keep it away from direct sunlight.

Direct sunlight may damage the wing's materials and cause premature aging. After landing, do not leave the wing exposed to the sun. Pack it properly and stow it away in its backpack.

If you fly in sandy areas, avoid getting sand in the cells or down into the trailing edge. At the end of the flight, empty any sand that is in your wing. The openings at the end of the wingtips make this much easier.

If your wing is wet from contact with salt water, immerse it in fresh water and dry it away from direct sunlight.

7.2 STORAGE

It is important for the wing to be correctly folded when stored. Keep it in the in a cool, dry place away from solvents, fuels, oils.

Do not leave your gear inside a car boot, as cars left in the sun can become very hot. A rucksack can reach temperatures up to 60°C.

Weight should not be laid on top of the equipment.

It is very important to pack the wing correctly before storage.

In case of long-term storage, it is advisable, if possible, that the wing is not compressed and it should be stored loosely without direct contact with the ground. Humidity and heating can have an adverse effect on the equipment.

7.3 CHECKS AND INSPECTIONS

The PEAK 6 must be periodically serviced. An inspection must be scheduled every 100 flying hours or every two years whichever comes first (EN/LTF norm).

We strongly recommend that any repairs should be done in a specialist repair shop by qualified personnel.

This will guarantee the airworthiness and continued certification of your PEAK 6.

A thorough pre-flight check must be performed before every flight.

The PEAK 6 is fitted with unsheathed lines. Their durability conforms to unsheathed line standards. Their strength is guaranteed and their resistance to UV is one of the highest in this type of lines.

The lines are made of a new waterproof coated material (Magix Pro Dry), which makes it easier to untangle knots and simplifies line sorting before flying.

However, to maintain the wing's standard performance, it is necessary to keep the trim constantly adjusted.

Generally speaking, line lengths change as the glider is used. For this reason we recommend a trim check after approximately the first 30

hours of flight. The hours or actions to be taken to repair the lines may vary for each glider, depending on the conditions of each flying area, climatic conditions, temperature, humidity, type of terrain, wing loading, etc.

Thanks to the experience acquired and the thorough inspections that our R+D team carry out on our gliders, we have the necessary information to be able to know the real behaviour of the lines. With this knowledge we can keep our gliders in the optimum condition for more flights without any loss of performance due to use.

The most important detail to check and/or repair on the lines are the so called "loops" (knots). In some models, such as the PEAK 6, the wings are delivered as standard with loops already installed. These loops must be released or readjusted according to the current line length.

Never adjust a paraglider according to the parameters of another paraglider. Each adjustment must be performed individually for each wing concerned, as a result of an analysis carried out by specialised and authorised personnel.

The line length adjustments may never exceed 1% of the length allowed by the type certification.

7.4 REPAIRS

In the case of small tears, you can temporarily repair these by using the Ripstop tape included in the repair kit, as long as no stitching is required to mend the fabric.

Any other tears or repairs should be done in a specialist repair shop by qualified personnel.

Damaged lines must be repaired or exchanged immediately. Please refer to the line plan at the end of this manual.

We recommend any inspection or repair is performed by a Niviuk professional [in our official workshop](#).

Any modification of the glider made in an external workshop will invalidate the guarantee of the product. Niviuk cannot be held responsible for any issues or damage resulting from modifications or repairs carried out by unqualified professionals or who are not approved by the manufacturer.

8. SAFETY AND RESPONSIBILITY

It is well known that free-flying with a paramotor or trike is considered a high-risk sport, where safety depends on the person who is practicing it.

Incorrect use of this equipment may cause severe, life-changing injuries to the pilot, or even death.

Manufacturers and dealers cannot be held responsible for your decisions, actions or accidents that may result from participating in this sport.

You must not use this equipment if you have not been properly trained to use it. Do not take advice or accept any informal training from anyone who is not properly qualified as a flight instructor.

9. GUARANTEE

The equipment and components are covered by a 2-year warranty against any manufacturing defect.

The warranty does not cover misuse of the equipment.

Any modification to the paraglider or its components invalidates the guarantee and the certification.

If you notice a fault or defect on your paraglider, contact Niviuk immediately for a full inspection.




ANNEXES

10. ANNEXES

10.1 Technical specifications

			21	22	24	26
Cells	Number		80	80	80	80
Aspect ratio	Flat		6,9	6,9	6,9	6,9
	Projected		5,26	5,26	5,26	5,26
Area	Flat	m2	20,5	22	23,7	26
	Projected	m2	17,55	18,83	20,29	21,83
Span	Flat	m	11,89	12,32	12,79	13,27
Chord	Max	m	2,2	2,28	2,36	2,45
Lines	Total	m	198	205	213	224
	Main		2-1/3	2-1/3	2-1/3	2-1/3
Risers	Number		A-A' /B	A-A' /B	A-A' /B	A-A' /B
	Speed-bar	mm	140	165	175	175
Glider weight		kg	4,8	5	5,3	5,6
Total weight in flight	Min-Max	kg	70-85	80-98	92-110	105-125
Opt. weight in flight	Min-Max	kg	78-82	89-94	104-107	115-120
Certification			EN/LTF D	EN/LTF D	EN/LTF D	EN/LTF D

The total weight of the wing may differ $\pm 2\%$ due to variations in the weight of the fabric supplied by the manufacturers.

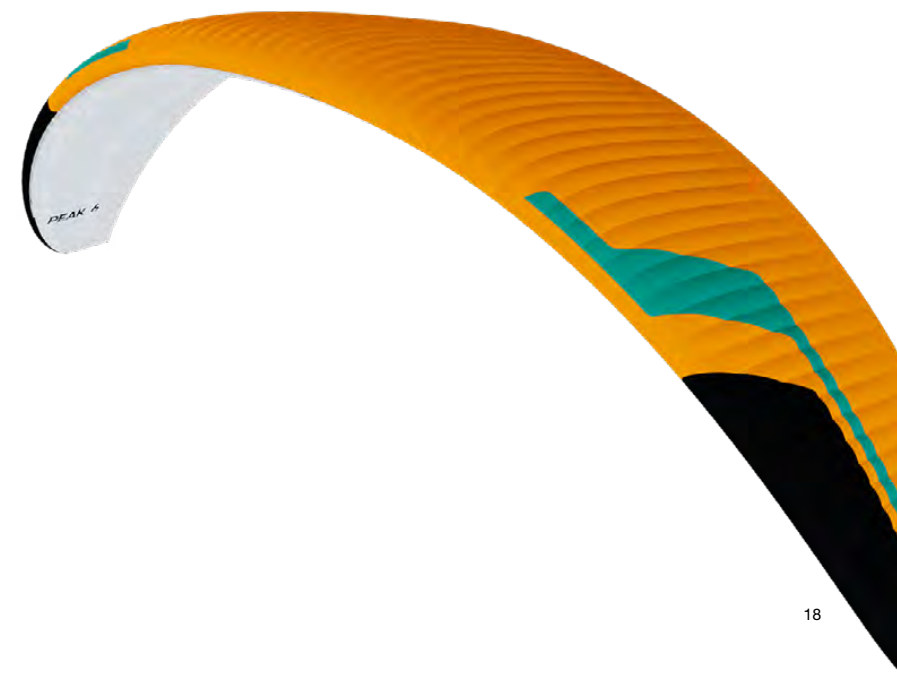

10.2 Colours



LIZARD	SB1	SPECTRA GREEN	TOP	REF: 5335
	SB2	WHITE	BOTTOM-ALL WHITE	REF: 001
	SB3	BLACK	HORN	REF: 102
	SB4	LIMA	PRINCIPAL SHADOW	REF: 500



ZURA	SB1	SLATE BLUE	TOP	REF: 317
	SB2	WHITE	BOTTOM	REF: 001
	SB3	PINK	HORN	REF: 2047
	SB4	WHITE	PRINCIPAL SHADOW	REF: 001



ZEESTER	SB1	ORANGE	TOP	REF: 744
	SB2	WHITE	BOTTOM	REF: 001
	SB3	BLACK	HORN	REF: 102
	SB4	SPECTRA GREEN	PRINCIPAL SHADOW	REF: 5335


10.3 Materials

CANOPY	FABRIC CODE	SUPPLIER
UPPER SURFACE	HYPERAIRTEX-41 / HYPERAIRTEX-36	DOMINICO TEX CO (KOREA)
BOTTOM SURFACE	70000 E3H	PORCHER IND (FRANCE)
PROFILES	30 DFM / 2044 32 FM	DOMINICO TEX CO (KOREA)
DIAGONALS	30 DFM / 2044 32 FM	DOMINICO TEX CO (KOREA)
LOOPS	LKI - 12	KOLON IND. (KOREA)
REINFORCEMENT LOOPS	DACRON / RIPSTOP	D-P (GERMANY)
TRAILING EDGE REINFORCEMENT	MYLAR	D-P (GERMANY)
RIBS REINFORCEMENT	LTN-0.8/0.5 STICK	SPORTWARE CO.CHINA
THREAD	SERAFIL 60	AMAN (GERMANY)

SUSPENSION LINES	FABRIC CODE	SUPPLIER
UPPER CASCADES	DC - 60	LIROS GMHB (GERMANY)
UPPER CASCADES	DC - 40	LIROS GMHB (GERMANY)
UPPER CASCADES	DC - 35	LIROS GMHB (GERMANY)
UPPER CASCADES	A-8001/U 50	EDELRID (GERMANY)
UPPER CASCADES	A-8001/U 70	EDELRID (GERMANY)
MIDDLE CASCADES	DC - 35	LIROS GMHB (GERMANY)
MIDDLE CASCADES	A-8001/U 50	EDELRID (GERMANY)
MIDDLE CASCADES	A-8001/U 70	EDELRID (GERMANY)
MIDDLE CASCADES	A-8001/U 90	EDELRID (GERMANY)
MIDDLE CASCADES	A-8001/U 130	EDELRID (GERMANY)
MIDDLE CASCADES	A-8001/U 190	EDELRID (GERMANY)
MIDDLE CASCADES	A-8001/U 230	EDELRID (GERMANY)
MAIN	A-8001/U 70	EDELRID (GERMANY)
MAIN	A-8001/U 130	EDELRID (GERMANY)
MAIN	A-8001/U 190	EDELRID (GERMANY)
MAIN	A-8001/U 340	EDELRID (GERMANY)
MAIN	A-8001/U 470	EDELRID (GERMANY)
MAIN BREAK	TARAX-200	EDELRID (GERMANY)
THREAD	SERAFIL 60	AMAN (GERMANY)

RISERS	FABRIC CODE	SUPPLIER
MATERIAL	3455	COUSIN (FRANCE)
COLOR INDICATOR	210D	TECNI SANGLES (FRANCE)
THREAD	V138	COATS (ENGLAND)
MAILLONS	3.5	ANSUNG PRECISION (KOREA)
PULLEYS	RF25109	RONSTAN (AUSTRALIA)

10.4 Line plan

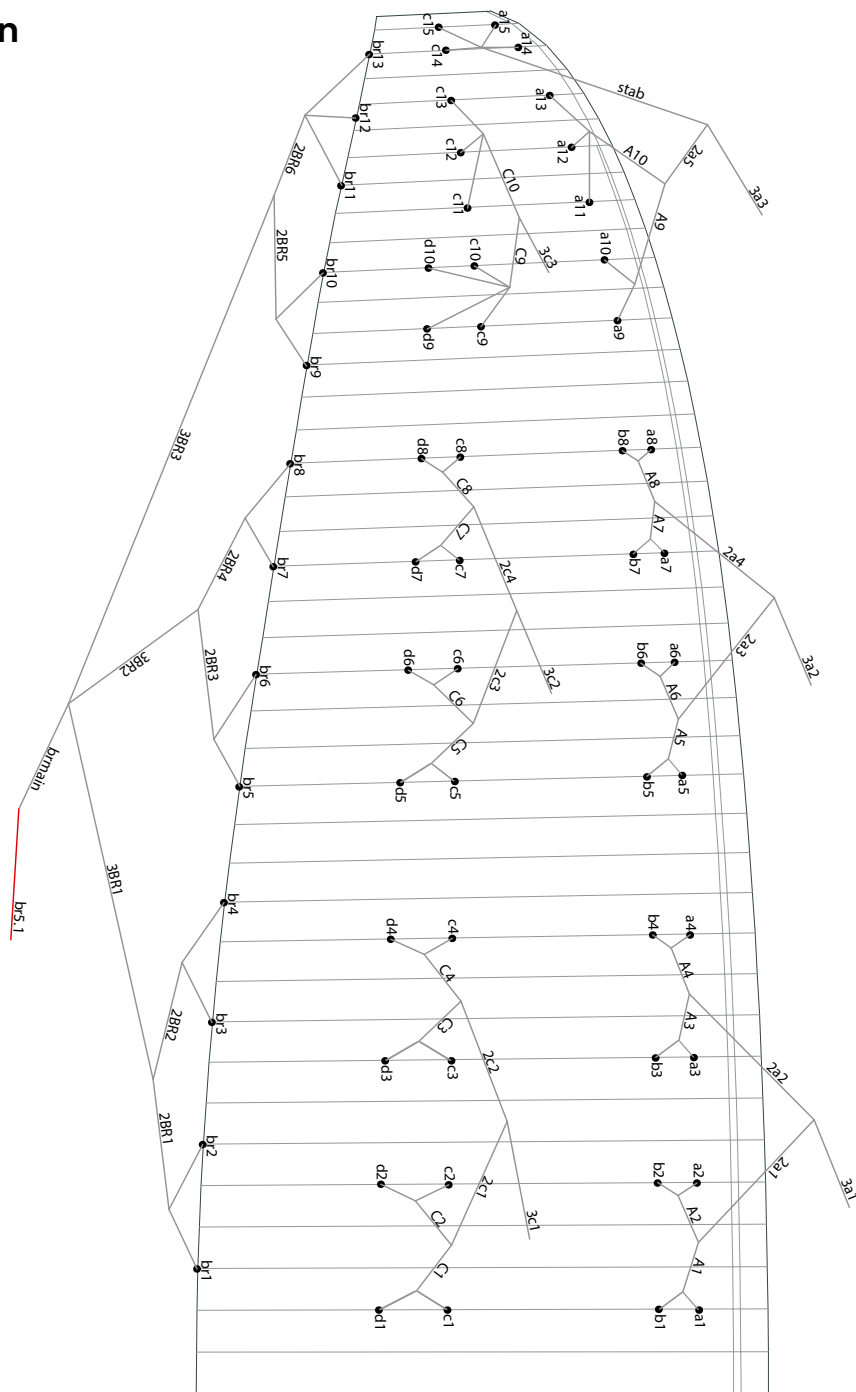

LINE REPLACEMENT

The use of new high performance materials in modern wings is now common. The advantages of using these materials in terms of performance are widely acknowledged as part of our sport's evolution. However, along with those technological advances come additional responsibilities which cannot be avoided. As a result, line inspection and replacement must be carried out more frequently. That increased frequency appears to be encouraging some pilots to try to perform line replacement themselves.

WE STRONGLY RECOMMEND ANY LINE REPLACEMENT IS PERFORMED BY AN AUTHORISED SPECIALIST ONLY.

Ultimately, if the pilot decides to perform any line replacement without professional oversight they therefore assume all responsibility. In this case, these guidelines will have to be followed.

BEFORE REMOVING ANY LINES, CHECK:

- That the line plan is correct according to the glider model and size.
- That the line kit is complete and correct. Never assume but always check each individual line for the correct specification.

AFTER CONFIRMING THAT ALL LINES ARE CORRECT:

- Fit the new line(s) **WITHOUT** removing the label.
- Once replaced, measure each line length to confirm the correct measurement.
- Inflate the wing to check for any irregularities.
- The line labels may then be removed but **NOT BEFORE** completion of the line replacement.

Niviuk strongly recommends for any line replacement to be carried out by an authorised professional only, and will not accept responsibility for any damage or injury caused as a result of incorrect re-assembly.

SPECIAL CONFIGURATION ON LINES 3C1 – 3C2 – 3C3

The 3C1 – 3C2 – 3C3 lines are connected to the maillon by means of a lark's foot/clove hitch. See diagram.

The lark's foot/clove hitch is used to adjust the trim to the preset range. The loop will allow readjustment of the trim due to use, stretching or shrinking. Failure to make this loop compromises the trim of the wing and the safety of the pilot.



10.5 Riser plan

A	A'	B
3a1	3a3	3c1
3a2		3c2
		3c3



10.6 Line measurements by size

PEAK 6 21

REF.	MAT.	kg	COLOR	mm	REF.	MAT.	kg	COLOR	mm	REF.	MAT.	kg	COLOR	mm	REF.	MAT.	kg	COLOR	mm	REF.	MAT.	kg	COLOR	mm
A					B					C					D					BRAKE				
a1	8001/U	70	ORANGE	353	b1	8001/U	50	ORG	324	c1	8001/U	50	BLUE	535	d1	DC	35	WHT	632	br1	DC	35	WHT	833
a2	8001/U	70	ORANGE	349	b2	8001/U	50	ORG	319	c2	8001/U	50	BLUE	527	d2	DC	35	WHT	625	br2	DC	35	WHT	561
a3	8001/U	70	ORANGE	342	b3	8001/U	50	ORG	312	c3	8001/U	50	BLUE	516	d3	DC	35	WHT	612	br3	DC	35	WHT	717
a4	8001/U	70	ORANGE	331	b4	8001/U	50	ORG	303	c4	8001/U	50	BLUE	485	d4	DC	35	WHT	570	br4	DC	35	WHT	783
a5	8001/U	70	ORANGE	323	b5	8001/U	50	ORG	297	c5	8001/U	50	BLUE	425	d5	DC	35	WHT	506	br5	DC	35	WHT	758
a6	8001/U	70	ORANGE	317	b6	8001/U	50	ORG	292	c6	8001/U	50	BLUE	386	d6	DC	35	WHT	459	br6	DC	35	WHT	570
a7	8001/U	70	ORANGE	303	b7	8001/U	50	ORG	279	c7	8001/U	50	BLUE	344	d7	DC	35	WHT	411	br7	DC	35	WHT	616
a8	8001/U	70	ORANGE	279	b8	8001/U	50	ORG	261	c8	8001/U	50	BLUE	308	d8	DC	35	WHT	365	br8	DC	35	WHT	684
a9	DC	60	WHT	809						c9	DC	40	WHT	600	d9	DC	35	WHT	660	br9	DC	35	WHT	628
a10	DC	35	WHT	713						c10	DC	35	WHT	503	d10	DC	35	WHT	562	br10	DC	35	WHT	516
a11	DC	35	WHT	733						c11	DC	35	WHT	519						br11	DC	35	WHT	828
a12	DC	35	WHT	677						c12	DC	35	WHT	487						br12	DC	35	WHT	825
a13	DC	35	WHT	697						c13	DC	35	WHT	550						br13	DC	35	WHT	900
a14	DC	35	WHT	601						c14	DC	35	WHT	623										
a15	DC	35	WHT	578						c15	DC	35	WHT	614										
A1	8001/U	90	ORANGE	985						C1	8001/U	50	Blue	496						2BR1	DC	35	Wht	839
A2	8001/U	90	ORANGE	902						C2	8001/U	50	BLUE	382						2BR2	DC	35	WHT	580
A3	8001/U	90	ORANGE	912						C3	8001/U	50	BLUE	395						2BR3	DC	35	WHT	730
A4	8001/U	90	ORANGE	963						C4	8001/U	50	BLUE	505						2BR4	DC	35	WHT	617
A5	8001/U	90	ORANGE	874						C5	8001/U	50	BLUE	501						2BR5	DC	35	WHT	821
A6	8001/U	90	ORANGE	766						C6	8001/U	50	BLUE	405						2BR6	DC	35	WHT	442
A7	8001/U	90	ORANGE	778						C7	8001/U	50	BLUE	445										
A8	8001/U	90	ORANGE	786						C8	8001/U	50	BLUE	513										
A9	8001/U	70	ORANGE	762						C9	8001/U	50	BLUE	548										
A10	8001/U	70	ORANGE	678						C10	8001/U	50	BLUE	482										
2a1	8001/U	190	ORANGE	1249						2c1	8001/U	90	BLUE	936						3BR1	8001/U	50	ORANGE	3251
2a2	8001/U	190	ORANGE	1229						2c2	8001/U	90	BLUE	916						3BR2	8001/U	50	ORANGE	2943
2a3	8001/U	190	ORANGE	1104						2c3	8001/U	90	BLUE	831						3BR3	8001/U	50	ORANGE	2651
2a4	8001/U	190	ORANGE	1037						2c4	8001/U	90	BLUE	775						BRMAIN	8001/U	90	ORANGE	1289
2a5	8001/U	90	ORANGE	1906																				
STAB	8001/U	50	ORANGE	2558																				
3a1	8001/U	340	ORANGE	4236						3c1	8001/U	190	BLUE	4861						br5.1	TARAX	200	RED	1500
3a2	8001/U	340	ORANGE	4369						3c2	8001/U	190	BLUE	4903										
3a3	8001/U	130	ORANGE	2806						3c3	8001/U	70	BLUE	5137						KNOT POINT:				1300

PEAK 6 22

REF.	MAT.	kg	COLOR	mm	REF.	MAT.	kg	COLOR	mm	REF.	MAT.	kg	COLOR	mm	REF.	MAT.	kg	COLOR	mm	REF.	MAT.	kg	COLOR	mm
A					B					C					D					BRAKE				
a1	8001/U	70	ORANGE	366	b1	8001/U	50	ORANGE	336	c1	8001/U	50	BLUE	554	d1	DC	35	WHT	655	br1	DC	35	WHT	863
a2	8001/U	70	ORANGE	362	b2	8001/U	50	ORANGE	330	c2	8001/U	50	BLUE	545	d2	DC	35	WHT	647	br2	DC	35	WHT	581
a3	8001/U	70	ORANGE	354	b3	8001/U	50	ORANGE	323	c3	8001/U	50	BLUE	535	d3	DC	35	WHT	633	br3	DC	35	WHT	743
a4	8001/U	70	ORANGE	342	b4	8001/U	50	ORANGE	314	c4	8001/U	50	BLUE	502	d4	DC	35	WHT	590	br4	DC	35	WHT	812
a5	8001/U	70	ORANGE	335	b5	8001/U	50	ORANGE	308	c5	8001/U	50	BLUE	440	d5	DC	35	WHT	524	br5	DC	35	WHT	786
a6	8001/U	70	ORANGE	329	b6	8001/U	50	ORANGE	302	c6	8001/U	50	BLUE	400	d6	DC	35	WHT	475	br6	DC	35	WHT	591
a7	8001/U	70	ORANGE	314	b7	8001/U	50	ORANGE	289	c7	8001/U	50	BLUE	357	d7	DC	35	WHT	426	br7	DC	35	WHT	637
a8	8001/U	70	ORANGE	289	b8	8001/U	50	ORANGE	271	c8	8001/U	50	BLUE	319	d8	DC	35	WHT	378	br8	DC	35	WHT	709
a9	DC	60	WHT	838						c9	DC	40	WHT	622	d9	DC	35	WHT	683	br9	DC	35	WHT	650
a10	DC	35	WHT	738						c10	DC	35	WHT	521	d10	DC	35	WHT	582	br10	DC	35	WHT	535
a11	DC	35	WHT	759						c11	DC	35	WHT	537						br11	DC	35	WHT	857
a12	DC	35	WHT	701						c12	DC	35	WHT	505						br12	DC	35	WHT	854
a13	DC	35	WHT	722						c13	DC	35	WHT	570						br13	DC	35	WHT	932
a14	DC	35	WHT	622						c14	DC	35	WHT	646										
a15	DC	35	WHT	599						c15	DC	35	WHT	637										
A1	8001/U	90	ORANGE	1019						C1	8001/U	50	Blue	513						2BR1	DC	35	Wht	869
A2	8001/U	90	ORANGE	934						C2	8001/U	50	BLUE	396						2BR2	DC	35	WHT	601
A3	8001/U	90	ORANGE	945						C3	8001/U	50	BLUE	410						2BR3	DC	35	WHT	755
A4	8001/U	90	ORANGE	998						C4	8001/U	50	BLUE	524						2BR4	DC	35	WHT	640
A5	8001/U	90	ORANGE	905						C5	8001/U	50	BLUE	519						2BR5	DC	35	WHT	850
A6	8001/U	90	ORANGE	794						C6	8001/U	50	BLUE	419						2BR6	DC	35	WHT	459
A7	8001/U	90	ORANGE	806						C7	8001/U	50	BLUE	461										
A8	8001/U	90	ORANGE	815						C8	8001/U	50	BLUE	532										
A9	8001/U	70	ORANGE	789						C9	8001/U	50	BLUE	568										
A10	8001/U	70	ORANGE	702						C10	8001/U	50	BLUE	500										
2a1	8001/U	190	ORANGE	1294						2c1	8001/U	90	BLUE	969						3BR1	8001/U	50	ORANGE	3367
2a2	8001/U	190	ORANGE	1273						2c2	8001/U	90	BLUE	950						3BR2	8001/U	50	ORANGE	3049
2a3	8001/U	190	ORANGE	1144						2c3	8001/U	90	BLUE	861						3BR3	8001/U	50	ORANGE	2750
2a4	8001/U	190	ORANGE	1074						2c4	8001/U	90	BLUE	803						BRMAIN	8001/U	90	ORANGE	1397
2a5	8001/U	90	ORANGE	1974																				
STAB	8001/U	50	ORANGE	2650																				
3a1	8001/U	340	ORANGE	4407						3c1	8001/U	190	BLUE	5054						br5.1	TARAX	200	RED	1500
3a2	8001/U	340	ORANGE	4547						3c2	8001/U	190	BLUE	5096										
3a3	8001/U	130	ORANGE	2930						3c3	8001/U	70	BLUE	5337						KNOT POINT:				1300

PEAK 6 24

REF.	MAT.	kg	COLOR	mm	REF.	MAT.	kg	COLOR	mm	REF.	MAT.	kg	COLOR	mm	REF.	MAT.	kg	COLOR	mm	REF.	MAT.	kg	COLOR	mm
A					B					C					D					BRAKE				
a1	8001/U	70	ORANGE	380	b1	8001/U	50	ORANGE	349	c1	8001/U	50	BLUE	575	d1	DC	35	WHT	655	br1	DC	35	WHT	896
a2	8001/U	70	ORANGE	375	b2	8001/U	50	ORANGE	343	c2	8001/U	50	BLUE	566	d2	DC	35	WHT	647	br2	DC	35	WHT	604
a3	8001/U	70	ORANGE	367	b3	8001/U	50	ORANGE	335	c3	8001/U	50	BLUE	555	d3	DC	35	WHT	633	br3	DC	35	WHT	770
a4	8001/U	70	ORANGE	355	b4	8001/U	50	ORANGE	326	c4	8001/U	50	BLUE	521	d4	DC	35	WHT	590	br4	DC	35	WHT	843
a5	8001/U	70	ORANGE	348	b5	8001/U	50	ORANGE	320	c5	8001/U	50	BLUE	457	d5	DC	35	WHT	524	br5	DC	35	WHT	815
a6	8001/U	70	ORANGE	341	b6	8001/U	50	ORANGE	314	c6	8001/U	50	BLUE	416	d6	DC	35	WHT	475	br6	DC	35	WHT	615
a7	8001/U	70	ORANGE	325	b7	8001/U	50	ORANGE	300	c7	8001/U	50	BLUE	370	d7	DC	35	WHT	426	br7	DC	35	WHT	661
a8	8001/U	70	ORANGE	300	b8	8001/U	50	ORANGE	281	c8	8001/U	50	BLUE	331	d8	DC	35	WHT	378	br8	DC	35	WHT	736
a9	DC	60	WHT	870						c9	DC	40	WHT	645	d9	DC	35	WHT	683	br9	DC	35	WHT	675
a10	DC	35	WHT	766						c10	DC	35	WHT	541	d10	DC	35	WHT	582	br10	DC	35	WHT	556
a11	DC	35	WHT	788						c11	DC	35	WHT	558						br11	DC	35	WHT	889
a12	DC	35	WHT	728						c12	DC	35	WHT	524						br12	DC	35	WHT	886
a13	DC	35	WHT	749						c13	DC	35	WHT	592						br13	DC	35	WHT	968
a14	DC	35	WHT	646						c14	DC	35	WHT	670										
a15	DC	35	WHT	622						c15	DC	35	WHT	661										
A1	8001/U	90	ORANGE	1057						C1	8001/U	50	Blue	532						2BR1	DC	35	Wht	901
A2	8001/U	90	ORANGE	970						C2	8001/U	50	BLUE	411						2BR2	DC	35	WHT	625
A3	8001/U	90	ORANGE	981						C3	8001/U	50	BLUE	425						2BR3	DC	35	WHT	783
A4	8001/U	90	ORANGE	1037						C4	8001/U	50	BLUE	545						2BR4	DC	35	WHT	666
A5	8001/U	90	ORANGE	939						C5	8001/U	50	BLUE	538						2BR5	DC	35	WHT	881
A6	8001/U	90	ORANGE	824						C6	8001/U	50	BLUE	435						2BR6	DC	35	WHT	477
A7	8001/U	90	ORANGE	837						C7	8001/U	50	BLUE	479										
A8	8001/U	90	ORANGE	847						C8	8001/U	50	BLUE	552										
A9	8001/U	70	ORANGE	819						C9	8001/U	50	BLUE	590										
A10	8001/U	70	ORANGE	729						C10	8001/U	50	BLUE	519										
2a1	8001/U	190	ORANGE	1342						2c1	8001/U	90	BLUE	1005						3BR1	8001/U	50	ORANGE	3492
2a2	8001/U	190	ORANGE	1322						2c2	8001/U	90	BLUE	986						3BR2	8001/U	50	ORANGE	3166
2a3	8001/U	190	ORANGE	1187						2c3	8001/U	90	BLUE	894						3BR3	8001/U	50	ORANGE	2858
2a4	8001/U	190	ORANGE	1115						2c4	8001/U	90	BLUE	834						BRMAIN	8001/U	90	ORANGE	1516
2a5	8001/U	90	ORANGE	2049																				
STAB	8001/U	50	ORANGE	2750																				
3a1	8001/U	340	ORANGE	4594						3c1	8001/U	190	BLUE	5266						br5.1	TARAX	200	RED	1500
3a2	8001/U	340	ORANGE	4743						3c2	8001/U	190	BLUE	5317										
3a3	8001/U	130	ORANGE	3065						3c3	8001/U	70	BLUE	5571						KNOT POINT:				1300

PEAK 6 26

REF.	MAT.	kg	COLOR	mm	REF.	MAT.	kg	COLOR	mm	REF.	MAT.	kg	COLOR	mm	REF.	MAT.	kg	COLOR	mm	REF.	MAT.	kg	COLOR	mm
A					B					C					D					BRAKE				
a1	8001/U	70	ORANGE	398	b1	8001/U	70	ORANGE	365	c1	8001/U	70	BLUE	602	d1	DC	35	WHT	711	br1	DC	40	WHT	938
a2	8001/U	70	ORANGE	393	b2	8001/U	70	ORANGE	359	c2	8001/U	70	BLUE	593	d2	DC	35	WHT	702	br2	DC	40	WHT	634
a3	8001/U	70	ORANGE	385	b3	8001/U	70	ORANGE	351	c3	8001/U	70	BLUE	581	d3	DC	35	WHT	688	br3	DC	40	WHT	806
a4	8001/U	70	ORANGE	372	b4	8001/U	70	ORANGE	342	c4	8001/U	70	BLUE	546	d4	DC	35	WHT	640	br4	DC	40	WHT	883
a5	8001/U	70	ORANGE	364	b5	8001/U	70	ORANGE	335	c5	8001/U	70	BLUE	479	d5	DC	35	WHT	569	br5	DC	40	WHT	854
a6	8001/U	70	ORANGE	357	b6	8001/U	70	ORANGE	328	c6	8001/U	70	BLUE	435	d6	DC	35	WHT	516	br6	DC	40	WHT	645
a7	8001/U	70	ORANGE	341	b7	8001/U	70	ORANGE	314	c7	8001/U	70	BLUE	388	d7	DC	35	WHT	462	br7	DC	40	WHT	692
a8	8001/U	70	ORANGE	315	b8	8001/U	70	ORANGE	294	c8	8001/U	70	BLUE	347	d8	DC	35	WHT	410	br8	DC	40	WHT	771
a9	DC	60	WHT	911						c9	DC	40	WHT	676	d9	DC	35	WHT	742	br9	DC	40	WHT	707
a10	DC	40	WHT	803						c10	DC	40	WHT	566	d10	DC	35	WHT	632	br10	DC	40	WHT	583
a11	DC	35	WHT	825						c11	DC	40	WHT	584						br11	DC	40	WHT	931
a12	DC	35	WHT	763						c12	DC	40	WHT	549						br12	DC	40	WHT	928
a13	DC	35	WHT	785						c13	DC	40	WHT	620						br13	DC	40	WHT	1014
a14	DC	35	WHT	677						c14	DC	40	WHT	702										
a15	DC	35	WHT	651						c15	DC	40	WHT	692										
A1	8001/U	130	ORANGE	1106						C1	8001/U	90	Blue	556						2BR1	DC	40	Wht	942
A2	8001/U	130	ORANGE	1016						C2	8001/U	90	BLUE	430						2BR2	DC	40	WHT	656
A3	8001/U	130	ORANGE	1028						C3	8001/U	90	BLUE	445						2BR3	DC	40	WHT	819
A4	8001/U	130	ORANGE	1088						C4	8001/U	90	BLUE	572						2BR4	DC	40	WHT	699
A5	8001/U	90	ORANGE	983						C5	8001/U	90	BLUE	563						2BR5	DC	40	WHT	922
A6	8001/U	90	ORANGE	864						C6	8001/U	90	BLUE	456						2BR6	DC	40	WHT	501
A7	8001/U	90	ORANGE	877						C7	8001/U	90	BLUE	502										
A8	8001/U	90	ORANGE	888						C8	8001/U	90	BLUE	579										
A9	8001/U	70	ORANGE	858						C9	8001/U	50	BLUE	618										
A10	8001/U	70	ORANGE	763						C10	8001/U	50	BLUE	543										
2a1	8001/U	230	ORANGE	1405						2c1	8001/U	130	BLUE	1052						3BR1	8001/U	70	ORANGE	3656
2a2	8001/U	230	ORANGE	1386						2c2	8001/U	130	BLUE	1034						3BR2	8001/U	70	ORANGE	3317
2a3	8001/U	190	ORANGE	1243						2c3	8001/U	130	BLUE	936						3BR3	8001/U	50	ORANGE	2997
2a4	8001/U	190	ORANGE	1169						2c4	8001/U	130	BLUE	874						BRMAIN	8001/U	190	ORANGE	1669
2a5	8001/U	130	ORANGE	2146																				
STAB	8001/U	90	ORANGE	2881																				
3a1	8001/U	470	ORANGE	4837						3c1	8001/U	230	BLUE	5532						br5.1	TARAX	200	RED	1500
3a2	8001/U	340	ORANGE	4996						3c2	8001/U	230	BLUE	5590										
3a3	8001/U	190	ORANGE	3240						3c3	8001/U	70	BLUE	5857						KNOT POINT:				1300

10.7 Total line length

PEAK 6 - 21

LINES HEIGHT mm

	A	B	C	D	br
1	7328	7299	7322	7419	7602
2	7241	7211	7200	7298	7330
3	7224	7194	7182	7278	7227
4	7264	7236	7261	7346	7293
5	7175	7149	7154	7235	7110
6	7061	7036	7019	7092	6922
7	6992	6968	6961	7028	6855
8	6976	6958	6993	7050	6923
9	6790		6783	6843	6779
10	6694		6686	6745	6667
11	6630		6636		6600
12	6574		6604		6597
13	6594		6667		6672
14	6482		6504		
15	6459		6495		

RISERS LENGHT mm

	A	A'	B	
	500	500	500	STANDARD
	360	405	500	ACCELERATED

PEAK 6 - 22

LINES HEIGHT mm

	A	B	C	D	br
1	7585	7556	7592	7695	7886
2	7496	7465	7466	7570	7604
3	7478	7448	7451	7551	7498
4	7519	7492	7532	7622	7567
5	7430	7404	7418	7504	7377
6	7313	7287	7278	7355	7182
7	7240	7216	7219	7290	7113
8	7224	7207	7252	7313	7185
9	7042		7039	7100	7037
10	6943		6939	7000	6922
11	6878		6888		6853
12	6818		6856		6850
13	6839		6921		6928
14	6719		6744		
15	6696		6735		

RISERS LENGHT mm

	A	A'	B	
	500	500	500	STANDARD
	335	380	500	ACCELERATED

PEAK 6 - 24

LINES HEIGHT mm

	A	B	C	D	br
1	7879	7848	7872	7976	8195
2	7787	7755	7742	7847	7903
3	7770	7738	7726	7828	7793
4	7814	7785	7812	7903	7866
5	7723	7695	7700	7787	7670
6	7601	7574	7556	7633	7470
7	7526	7501	7494	7565	7399
8	7511	7492	7528	7589	7474
9	7310		7304	7368	7320
10	7206		7200	7263	7201
11	7138		7146		7130
12	7078		7112		7127
13	7099		7180		7209
14	6978		7002		
15	6954		6993		

RISERS LENGHT mm

	A	A'	B	
	500	500	500	STANDARD
	325	370	500	ACCELERATED

PEAK 6 - 26

LINES HEIGHT mm

	A	B	C	D	br
1	8253	8220	8251	8360	8595
2	8158	8124	8116	8226	8291
3	8142	8109	8101	8208	8177
4	8190	8159	8192	8287	8254
5	8093	8064	8076	8167	8050
6	7967	7938	7926	8006	7840
7	7890	7863	7862	7936	7766
8	7874	7854	7899	7962	7846
9	7664		7664	7730	7685
10	7556		7554	7620	7561
11	7484		7498		7488
12	7421		7462		7485
13	7443		7533		7571
14	7316		7332		
15	7291		7322		

RISERS LENGHT mm

A	A'	B	
500	500	500	STANDARD
325	370	500	ACCELERATED

10.8 Minimum strength of suspension lines

LINE REFERENCE	SIZE			
	21	22	24	26
8001U-50	20	24	26	30
8001U-70	23	27	30	35
8001U-90	39	45	51	58
8001U-130	47	54	60	69
8001U-190	82	95	107	121
8001U-230	96	110	124	141
8001U-340	151	174	195	222
8001U-470	205	236	265	302
DC-35	20	24	26	30
DC-40	29	33	37	42
DC-60	42	49	55	62

Minimum resistance values in daN


Based on the original experimental resistance values of each suspension line material obtained in certification tests, a correction factor is applied depending on the material and its aging, resulting in the reference values shown in the table.

10.9 Maillon & Pulley

DESCRIPTION

MAILLON	DELTA
CODE	3.5
MATERIAL	STAINLESS STEEL
SIZE	3 mm
WEIGHT	5 G/PIECE
QUANTITY	6 PIECES
INSERTS	2 GREEN / 4 BLACK

TECHNICAL SPECIFICATIONS

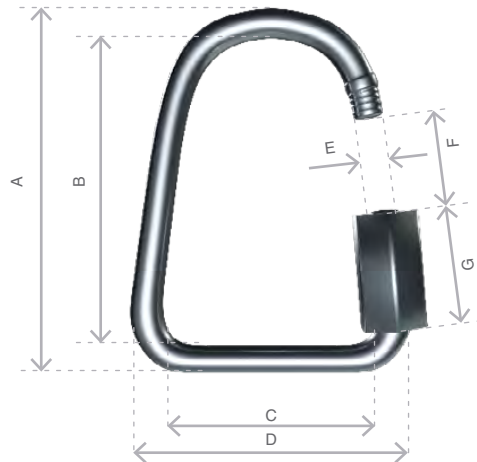

DIMENSIONS	mm
A	37
B	29
C	14
D	22
E	4
F	5
G	12
LOAD	KG
WORKING LIMIT	110
BREAKING	550

MATERIAL

AISI 304 STAINLESS STEEL

STANDARD

CLOSING APPLIED BY MANUAL & ENTIRE SCREWING OF THE NUT

TO GUARANTEE THE HIGHEST SAFETY (NO THREAD SHOULD BE OBVIOUS)

SYSTEMATIC CONTROL OF MAILLON QUICK-LINKS BEFORE EVERY FLIGHT

DESCRIPTION

PULLEY	20 mm
CODE	RF25109
MATERIALS	STAINLESS STEEL NYLON CARBON ACETAL
BEARING	DELRIN®
WEIGHT	9 G/PIECE

TECHNICAL SPECIFICATIONS



DIMENSIONS	mm
A	32
B	20
C	20
Ø	6 max
LOAD	KG
WORKING LIMIT	250
BREAKING	550

10.10 Certification

AIR TURQUOISE SA | PARA-TEST.COM

Route du Pré-au-Comte 8 • CH-1844 Villeneuve • +41 (0)21 965 65 65

Test laboratory for paragliders, paraglider harnesses and paraglider reserve parachutes



Classification: **D**



In accordance with standards EN 926-1:2015, EN 926-2:2013+A1:2021 and NfL 2-565-20

Date of issue (DMY):

Manufacturer:

Model:

Serial number:

PG_2120.2023

19.04.2023

Niviuk Gliders / Air Games S.L.

PEAK 6 21

PEAK621

Configuration during flight tests

Paraglider

Maximum weight in flight (kg) **85**
 Minimum weight in flight (kg) **70**
 Glider's weight (kg) **4.8**
 Number of risers **2+1**
 Projected area (m2) **17.55**

Accessories

Range of speed system (cm) **13.5**
 Speed range using brakes (km/h) **13**
 Total speed range with accessories (km/h) **31**
 Range of trimmers (cm) **0**

Harness used for testing (max weight)

Harness type **ABS**
 Harness brand **Niviuk Gliders**
 Harness model **Konvers M**

Inspections (whichever happens first)

every 100 hours of use or every 24 months
 Warning! Before use refer to user's manual
 Person or company having presented the glider for testing: **None**

Harness to risers distance (cm) **44**
 Distance between risers (cm) **44**

1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23
C A B C A A A A B D A A B D A A A B 0 A A A A

AIR TURQUOISE SA | PARA-TEST.COM

Route du Pré-au-Comte 8 • CH-1844 Villeneuve • +41 (0)21 965 65 65

Test laboratory for paragliders, paraglider harnesses and paraglider reserve parachutes



Classification: **D**



In accordance with standards EN 926-1:2015, EN 926-2:2013+A1:2021 and NfL 2-565-20

Date of issue (DMY):

Manufacturer:

Model:

Serial number:

PG_2078.2022

12.01.2023

Niviuk Gliders / Air Games S.L.

Peak 6 22

PEAK6422

Configuration during flight tests

Paraglider

Maximum weight in flight (kg) **98**
 Minimum weight in flight (kg) **80**
 Glider's weight (kg) **5.1**
 Number of risers **2+1**
 Projected area (m2) **18.83**

Accessories

Range of speed system (cm) **15.9**
 Speed range using brakes (km/h) **12**
 Total speed range with accessories (km/h) **35**
 Range of trimmers (cm) **0**

Harness used for testing (max weight)

Harness type **ABS**
 Harness brand **Dudek**
 Harness model **Zero Gravity M**

Inspections (whichever happens first)

every 100 hours of use or every 24 months
 Warning! Before use refer to user's manual
 Person or company having presented the glider for testing: **Tim Rochas**

Harness to risers distance (cm) **43**
 Distance between risers (cm) **44**

1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23
C A B C A A A A B D A A B D A A A B 0 A A A A



Classification: **D**



In accordance with standards EN 926-1:2015, EN 926-2:2013+A1:2021 and NfL 2-565-20

Date of issue (DMY):

Manufacturer:

Model:

Serial number:

PG_2127.2023

19.04.2023

Niviuk Gliders / Air Games S.L.

PEAK 6 24

PEAK624

Configuration during flight tests

Paraglider		Accessories	
Maximum weight in flight (kg)	110	Range of speed system (cm)	17.1
Minimum weight in flight (kg)	92	Speed range using brakes (km/h)	13
Glider's weight (kg)	5.4	Total speed range with accessories (km/h)	31
Number of risers	2+1	Range of trimmers (cm)	0
Projected area (m2)	20.29		

Harness used for testing (max weight)		Inspections (whichever happens first)	
Harness type	ABS	every 100 hours of use or every 24 months	
Harness brand	Dudek	Warning! Before use refer to user's manual	
Harness model	Zero Gravity M	Person or company having presented the glider for testing: None	
Harness to risers distance (cm)	43		
Distance between risers (cm)	48		

1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23
C A B A A A A A C D A A C D A A A B 0 A A A A



Classification: **D**



In accordance with standards EN 926-1:2015, EN 926-2:2013+A1:2021 and NfL 2-565-20

Date of issue (DMY):

Manufacturer:

Model:

Serial number:

PG_2179.2023

19.04.2023

Niviuk Gliders / Air Games S.L.

PEAK 6 26

PEAK626FTV1

Configuration during flight tests

Paraglider		Accessories	
Maximum weight in flight (kg)	125	Range of speed system (cm)	16.2
Minimum weight in flight (kg)	105	Speed range using brakes (km/h)	13
Glider's weight (kg)	5.8	Total speed range with accessories (km/h)	31
Number of risers	2+1	Range of trimmers (cm)	0
Projected area (m2)	21.83		

Harness used for testing (max weight)		Inspections (whichever happens first)	
Harness type	ABS	every 100 hours of use or every 24 months	
Harness brand	Dudek	Warning! Before use refer to user's manual	
Harness model	Zero Gravity M	Person or company having presented the glider for testing: None	
Harness to risers distance (cm)	43		
Distance between risers (cm)	48		

1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23
C A B C A A A A D D A A C D A A A B 0 A A A A



Niviuk Paragliders

C/ Del Ter 6 - D

17165 La Cellerà de Ter - Girona - Spain

+34 972 422 878 | info@niviuk.com

www.niviuk.com