



Let's get started with your new Niviuk product!

This QUICK START guide will give you an overview of the first steps to start flying with your new ARROW P 2.


If you want or need to delve deeper into these or other aspects of your harness, please consult the product manual here:

MANUAL ARROW P 2

* The manual contains more information about your new product, and we recommend that you read it carefully before your first flight.



HOW TO CLOSE your harness




Pass your right leg through the closed side of the harness.



Close the ventral buckle and place it perpendicularly, making sure to pass the elastic loop around the webbing after fastening the toggle.



Close the pod to the right side.



Close the pod on the left side using the new double-safety closing system integrated into the pod.




Clip the cockpit buckle.

HOW TO CONNECT IT to the wing

Connect the ARROW P 2 to the wing using the aluminum carabiner. The right side is green, and the left side is red.

 $ig(\,!\,ig)$ Always ensure that the carabiners are properly closed and secured.

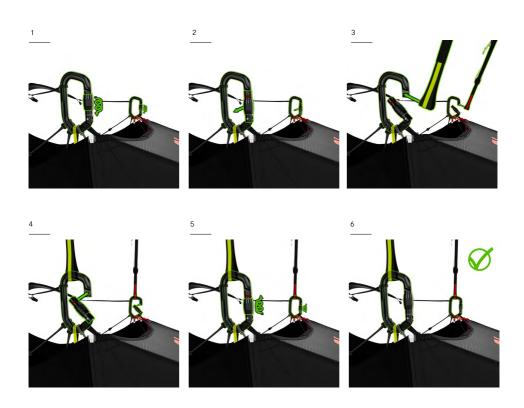

INSTALLATION of the protection

As standard, the ARROW P 2 comes with a *foam protector* made of three low-density layers. It provides an excellent balance between impact absorption and lightness, and it requires no additional steps to use.



Optionally, you can use the Apair inflatable protector.



Remove the foam protector and insert the inflatable one with the information sticker facing forward.



Connect the tube and route it through the left side so it reaches the carabiner area.



Fill the Infbag with air, close it, and connect it to the tube.



Make sure the air inlet/outlet valve is open.



As you compress the Infbag, the protector will inflate.

INSTALLATION of the parachute

In the <u>manual and the video tutorial</u> of the harness, you can see how to install the parachute.

Your safety depends on the parachute being installed correctly. Perform the process with care. We recommend having it done by a professional.



ADJUSTABLE to your needs

Adapt the ARROW P 2 to the shape of your body. The shoulder straps can be adjusted to your preference using a simple loop on the carabiner. The back and lumbar straps are also adjustable, allowing you to adapt the harness angle and shape to your body. The chest strap lets you finetune the harness width.



Adjust the length of the pod to your size using the cords located on the inner sides of the pod. Make sure to correctly set the harness angle as shown below, finding the right balance between the back, seat and pod adjustments.



PACKING

If you are using the Apair, start by opening the clip and gently pushing the air out of the protection.

The folding process is the same with either type of protection:

- 1. Fold the front part of the pod onto the seat.
- 2. Fold the upper back section of the harness onto itself, and do the same with the tail.
- 3. Place the wing on top so it forms the back of the rucksack, then insert everything inside.
- Avoid bending the harness in the middle to prolong its durability.



MYNIVIUK:

Register your product

You can register your new ARROW P 2 harness on the Niviuk website, under the My Niviuk section, and enjoy its benefits.

PRODUCT REGISTER

WARRANTY:

Quality commitment

All equipment and its components are covered by a 2-year warranty against any manufacturing defects.

The warranty does not cover misuse or normal wear and tear of materials.

Any modifications made to the harness or its components invalidate the warranty and certification.

If you notice any defects in your harness, contact Niviuk immediately for a thorough inspection.

NIVIUK SERVICE:

Care and maintenance

Your harness should undergo inspection every 24 months and be regularly checked by a professional. Any potential damage should be repaired at an official workshop before the next flight.

Niviuk Service is the official workshop of Niviuk. We aim to ensure the safety and durability of your new product, so our workshop is the perfect place to have it inspected and/or repaired.

NIVIUK SERVICE

