

AIR TURQUOISE SA | PARA-TEST.COM
Route du Pré-au-Comte 8 • CH-1844 Villeneuve • +41 (0)21 965 65 65

Test laboratory for paragliders, paraglider harnesses
and paraglider reserve parachutes



PARAGLIDERS HARNESS PH

MANUFACTURER _____

Niviuk Gliders - Air Games

INSPECTION NUMBER _____

PH_218.2018

MODEL and SIZE _____

Konverse 2 M

MAXI LOAD [kg] _____

120

INTEGRATE RESCUE SYSTEM

CONTAINER _____

YES

Volum [cm3] : min 8500 max 11500

SERIAL NUMBER (attest the conformity of this equipment).....

HARNESS PROTECTOR

NfL 91/09 chapter 5

REMOVABLE PROTECTORS

YES

IF YES : manufacturer: Serial Number

PRODUCTION DATE (year and month)

**Read the operating manual befor using this equipment !
(Service intervals, etc...)**

European Standard EN1651:1999 | EN12491:2001

Airworthiness requirements for hang gliders and paragliders LTF 2009 as published in NfL 91/09
chapter 4 and 6

This model has been tested according to the applying rules and regulations,
it corresponds with the tested sample and is airworthy.

GB | REV02 | 03.09.2015 | ISO | 71.9.8

PH PARAGLIDER HARNESSSES

INSPECTION CERTIFICATE

Inspection certificate number: **PH_218.2018**

MANUFACTURER DATA

Manufacturer name: **Niviuk Gliders - Air Games**
Contact person: **Dominique Cizeau**
Street: **C. Del Ter, 6-Nave D**
Post code / place: **17165 La Cellera de Ter Girona**
Country: **Spain**

SAMPLE DATA

Name: **Konverse 2** Size: **M**
Type: **ABS** Pilot max load [kg]: **120**
Impact pad type: **Airbag** Weight [kg]: **3.4**
Serial number: **Konvers2-M V5** Reception date: **24.10.2017**
Volume reserve parachute container [cm3] Min: **8500**
Max: **11500**

ISSUE DATA

Place of declaration: **Villeneuve**
Date of issue: **01.03.2018**
Managing Director: **Alain Zoller**

Signature: 

This signature approve the validity of the test reports no: R0,R2,R4,R6,R8,R9,R10

Air Turquoise SA, having thoroughly assessed the sample mentioned hereunder, declare it was found conform with all requirements defined by the following norms

European Standard **EN1651** September 1999 | Test no: R0,R2,R4,R6,R8,R9,R10
Test recognized for the standard: Airworthiness Requirements LTF NFL 2009 in 91/09 chapter 4.2.1

European Standard **EN12491** September 2001 | Test no: RRDT,RRST
Test recognized for the standard: Airworthiness Requirements LTF NFL 2009 in 91/09 chapter 6.1.5 and 6.1.8

Present declaration's scope only extends to the conformity of a given sample, on a given date and in a given place – as mentioned here above.

This inspection report contain the following test and is complet with the test report:
71.9.1 | PH ID **R0,R2,R4,R6,R8,R9,R10, RRDT,RRST**

Inspection certificate number: **PH_218.2018****A. STRUCTURAL STRENGTH TESTS SUMMARY**

A test plan was set up in order to execute the different tests in an efficient order. The table below summarizes this test plan together with the applicable standards and results

Test ID	TESTED ?	Standard Ref.	TEST setup	Anchoring		Forces		Min. Test duration [sec]	Result
		EN 1651:1999		Attach -ment points	Dummy	Req. Load in [g] force	Min. force [N]		
R0	✓	5.3.2.1	Default flying position	2 main attachment points	Hip fixated	6	6000	10	POSITIVE
R2	✓	5.3.2.2				15	15000	5	POSITIVE
R4	✓	5.3.2.7	Flying position before landing	Main risers attachments	landing conf.	15	15000	5	POSITIVE
R6	✓	5.3.2.4	Rescue attachments	Rescue riser attachments	Hip fixed	15	15000	5	POSITIVE
R8	✓	5.3.2.3	One riser	ONE main att.	1 central hip fixation	6	6000	10	POSITIVE
R9		5.3.2.5	Towing	2 main att. + 2 tow att.		3	3000	10	n/a
					None	5	5000		
R10	✓	5.3.2.6	Default, Negatif	One main att.	Head fix.	4.5	4500	10	POSITIVE

B. RESCUE DEPLOYMENT RESISTANCE TEST SUMMARY

The deployment of the rescue system has to be ensured in all circumstances of flight. This test is to verify whether the force needed to deploy is in between reasonable limits

Test ID	TESTED ?	Standard Ref.	TEST setup	Anchoring		Force for single hand deployment		Result
		EN 12491:2001		Attachment points	Dummy	Min.	Resistance measured [N]	
						Max.		
						[N]		
RRDT	✓	6.1.5	Default flying position	Test sample is attached to the dummy like a pilot in flight.		20	50.0	POSITIVE
				(no dummy required)		70		POSITIVE

C. RESCUE DEPLOYMENT STRAP STRENGTH TEST SUMMARY

The connection between handgrip and inner container has to have sufficient load capacity/structural strength in any situation that may arise during normal use. During this test is verified, whether this connection fulfill the requirements

Test ID	TESTED ?	Standard Ref.	TEST setup	Minimum force [N]	Min.	Breaking resistance measured [N]	Result
		EN 12491:2001			Test duration [s]		
RRST	✓	5.3.2	Connection strap in tensile testing machine	700	10	902.0	POSITIVE

Calculated value in tests reports include the value minus the uncertainty (on safe side) / The uncertainty stated is the expanded uncertainty obtained by multiplying the standard uncertainty by the coverage factor $k = 2$. The value of the measurand lies within the assigned range of values with a probability of 95%.

This declaration must not be reproduced in part without the written permission of AIR TURQUOISE SA.

HARNESS STRUCTURAL STRENGTH TEST

TEST REPORT PH ID 0

PH PARAGLIDER HARNESSES

Inspection certificate number: **PH_218.2018**

Manufacturer name: **Niviuk Gliders - Air Games**

Name: **Konverse 2**

Max load [kg] : **120**

Serial number : **Konvers2-M V5**

Place and date of test : **Villeneuve, 24.10.2017**

Test responsible: **Alain Zoller**

Directives: **EN 1651:1999**

Test standard §: **5.3.2.1**

Test setup: **Default flying position**

Attachment points: **Both main riser attachments (3, 4)**


Dummy: **Default, hip fixed (7, 8)**

Required load in force [g] : **6**

Model max load [kg]: **120**

Required test load in [N]: **7063**

Min. duration test load [s]: **10**



Results

Duration of maintained min. load [s]: **14.70**

[C°] **23.9**


Any signs of structural failure after this test: **no failure**

RH [%] **48**

Test result: **POSITIVE**

[hPa] **1028.7**

Graph: **D0**

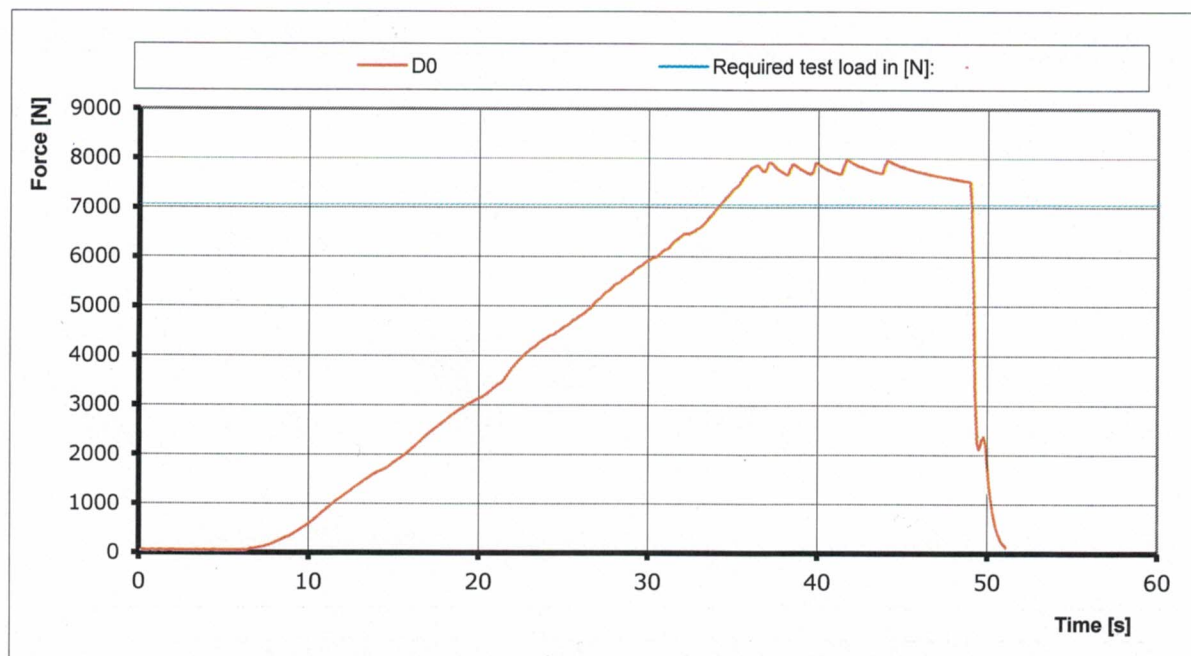

Instruments	Validity calibration	Manufacturer	Type nr.	S/N
Load sensor	14.10.2017	HBM	1-S9M/50KN-1	31314652
Geos n°11 Skywatch	07.04.2017	JDC	Geos n° 11	0022

The validation of this test report is given by the signature of the test manager on the Inspection Certificate no 71.9.1

HARNESS STRUCTURAL STRENGTH TEST

TEST REPORT PH ID 2

PH PARAGLIDER HARNESSES

Inspection certificate number: **PH_218.2018**

Manufacturer name: **Niviuk Gliders - Air Games**

Name: **Konverse 2**

Max load [kg] : **120**

Serial number : **Konvers2-M V5**

Date of test : **Villeneuve, 24.10.2017**

Test responsible: **Alain Zoller**

Directives: **EN 1651:1999**

Test standard §: **5.3.2.2**

Test setup: **Default flying position**

Attachment points: **Both main riser attachments (3, 4)**


Dummy: **Default, hip fixed (7, 8)**

Required load in force [g] : **15**

Model max load [kg]: **120**

Required test load in [N]: **17658**

Min. duration [s]: **5**



Results

Duration of maintained min. load [s]: **10.65**

[C°] **23.9**


Any signs of structural failure after this test: **no failure**

RH [%] **48**

Test result: **POSITIVE**

[hPa] **1028.7**

Graph: **D2**

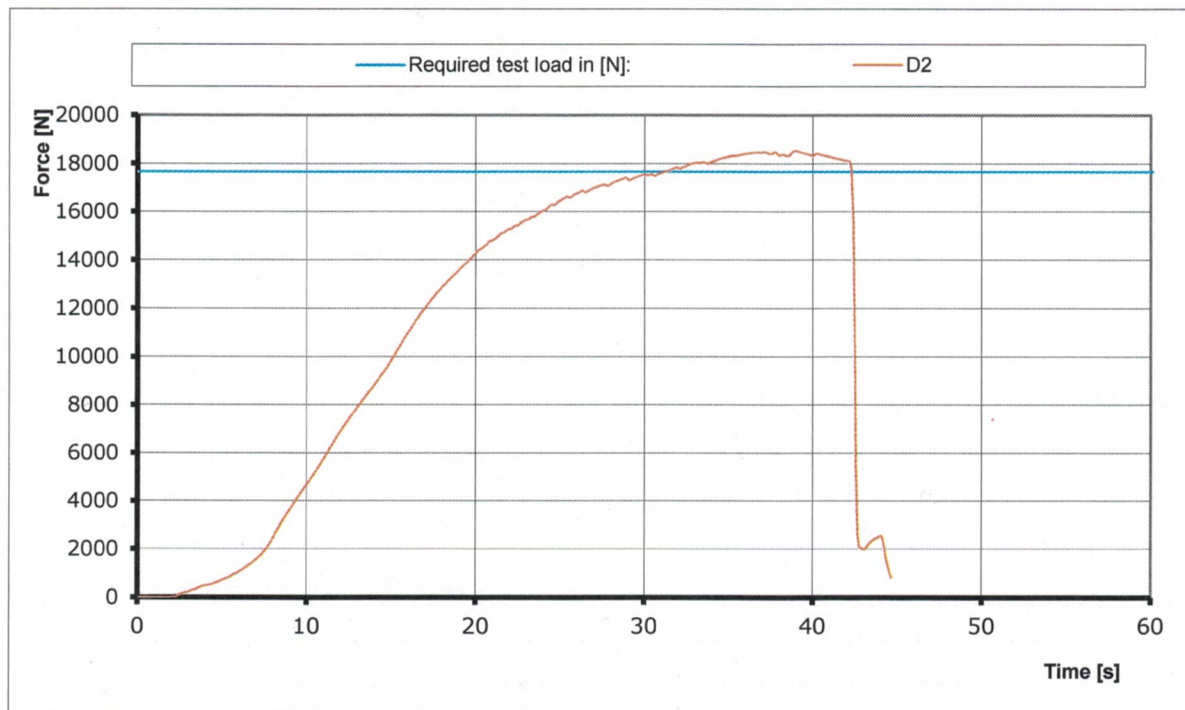

Instruments	Validity calibration	Manufacturer	Type nr.	S/N
Load sensor	14.10.2017	HBM	1-S9M/50KN-1	31314652
Geos n°11 Skywac	07.04.2017	JDC	Geos n° 11	0022

The validation of this test report is given by the signature of the test manager on the Inspection Certificate no 71.9.1

HARNESS STRUCTURAL STRENGTH TEST

TEST REPORT PH ID 4

PH PARAGLIDER HARNESSSES

Inspection certificate number: PH_218.2018

Manufacturer name: Niviuk Gliders - Air Games

Name: Konverse 2

Max load [kg]: 120

Serial number: Konvers2-M V5

Date of test: Villeneuve, 15.12.2017

Test responsible: Alain Zoller

Directives: EN 1651:1999

Test standard §: EN 5.3.2.7

Flying position before landing: seat

Test setup: board (11) in landing position, leg straps (10) closed.

Attachment points: Both of the main riser attachments attached (3 and 4);


Dummy: Default, hip fixed (7, 8)

Required load in force [g]: 15

Model max load [kg]: 120

Required test load in [N]: 17658

Min. duration [s]: 5



Results

Duration of maintained min. load [s]: 7.55

[C°] 21.2


Any signs of structural failure after this test: no failure

RH [%] 34

Test result: **POSITIVE**

[hPa] 1003.3

Graph: D4

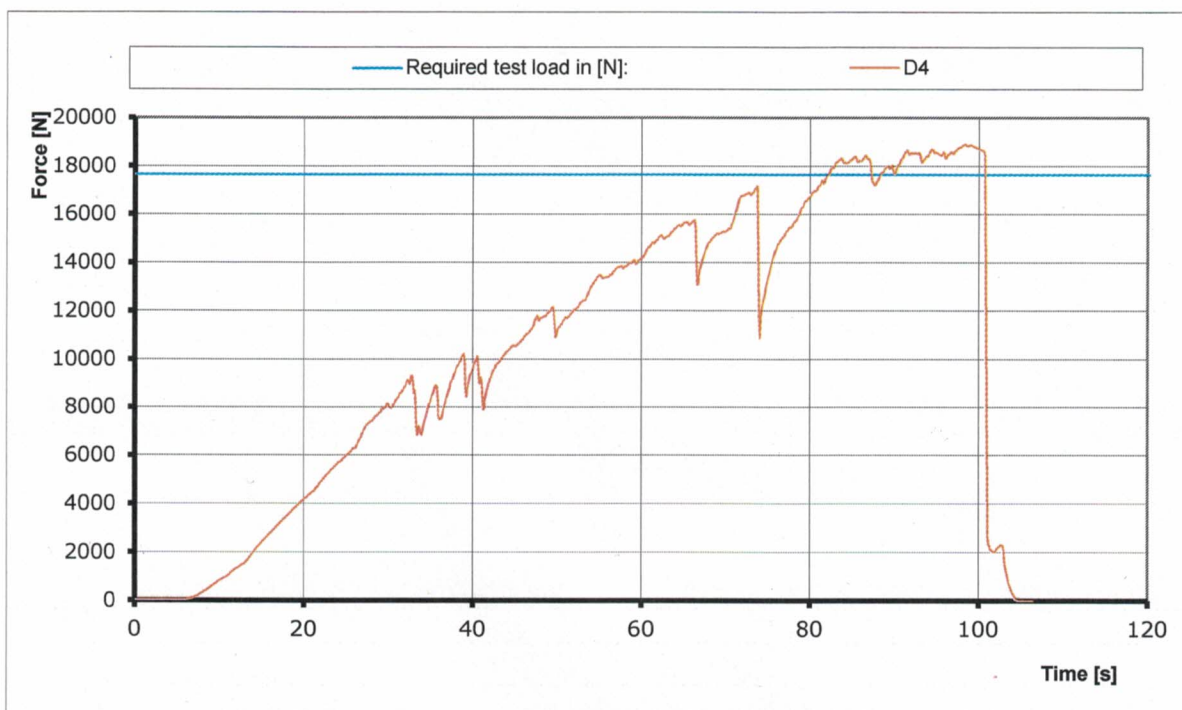

Instruments	Validity calibration	Manufacturer	Type nr.	S/N
Load sensor	14.10.2017	HBM	1-S9M/50KN-1	31314652
Geos n°11 Skywatch	07.04.2017	JDC	Geos n° 11	0022

The validation of this test report is given by the signature of the test manager on the Inspection Certificate no 71.9.1

HARNESS STRUCTURAL STRENGTH TEST

TEST REPORT PH ID 6

PH PARAGLIDER HARNESSSES

Inspection certificate number: PH_218.2018

Manufacturer name: Niviuk Gliders - Air Games

Name: Konverse 2

Max load [kg] : 120

Serial number : Konvers2-M V5

Date of test : Villeneuve, 15.12.2017

Test responsible: Alain Zoller

Directives: EN 1651:1999

Test standard §: 5.3.2.4

Test setup: Rescue attachments

Attachment points: Rescue riser attachments (1,2)


Dummy: Hip fixed (7, 8)

Required load in force [g] : 15

Model max load [kg]: 120

Required test load in [N]: 17658

Min. duration [s]: 5



Results

Duration of maintained min. load [s]: 10.95

[C°] 21.2


Any signs of structural failure after this test: no failure

RH [%] 34

Test result: **POSITIVE**

[hPa] 1003.3

Graph: D6

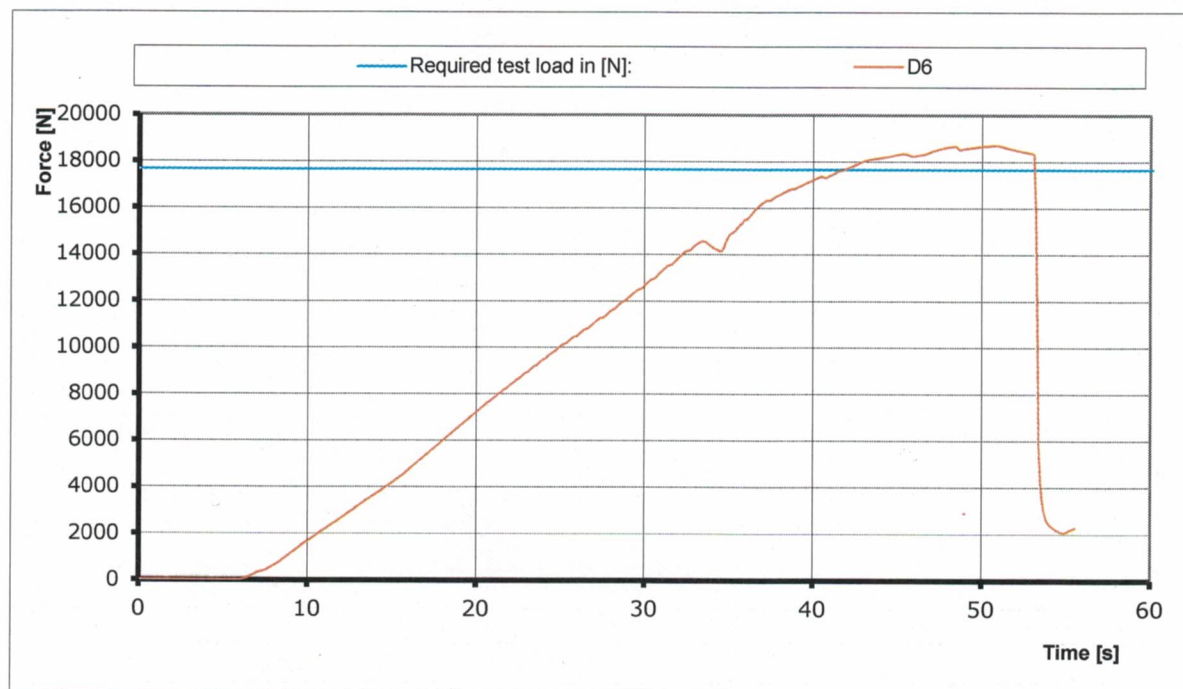

Instruments	Validity calibration	Manufacturer	Type nr.	S/N
Load sensor	14.10.2017	HBM	1-S9M/50KN-1	31314652
Geos n°11 Skywate	07.04.2017	JDC	Geos n° 11	0022

The validation of this test report is given by the signature of the test manager on the Inspection Certificate no 71.9.1

HARNESS STRUCTURAL STRENGTH TEST

TEST REPORT PH ID 8

PH PARAGLIDER HARNESSES

Inspection certificate number: **PH_218.2018**

Manufacturer name: **Niviuk Gliders - Air Games**

Name: **Konverse 2**

Max load [kg] : **120**

Serial number : **Konvers2-M V5**

Date of test : **Villeneuve, 24.10.2017**

Test responsible: **Alain Zoller**

Directives: **EN 1651:1999**

Test standard §: **5.3.2.3**

Test setup: **Only one riser attached**

Attachment points: **One main riser attachments (3)**


Dummy: **Hip fixed (7, 8 -> 12)**

Required load in force [g] : **6**

Model max load [kg]: **120**

Required test load in [N]: **7063**

Min. duration [s]: **10**



Results

Duration of maintained min. load [s]: **17.04**

[C°] **23.9**


Any signs of structural failure after this test: **no failure**

RH [%] **48**

Test result: **POSITIVE**

[hPa] **1028.7**

Graph: **D8**

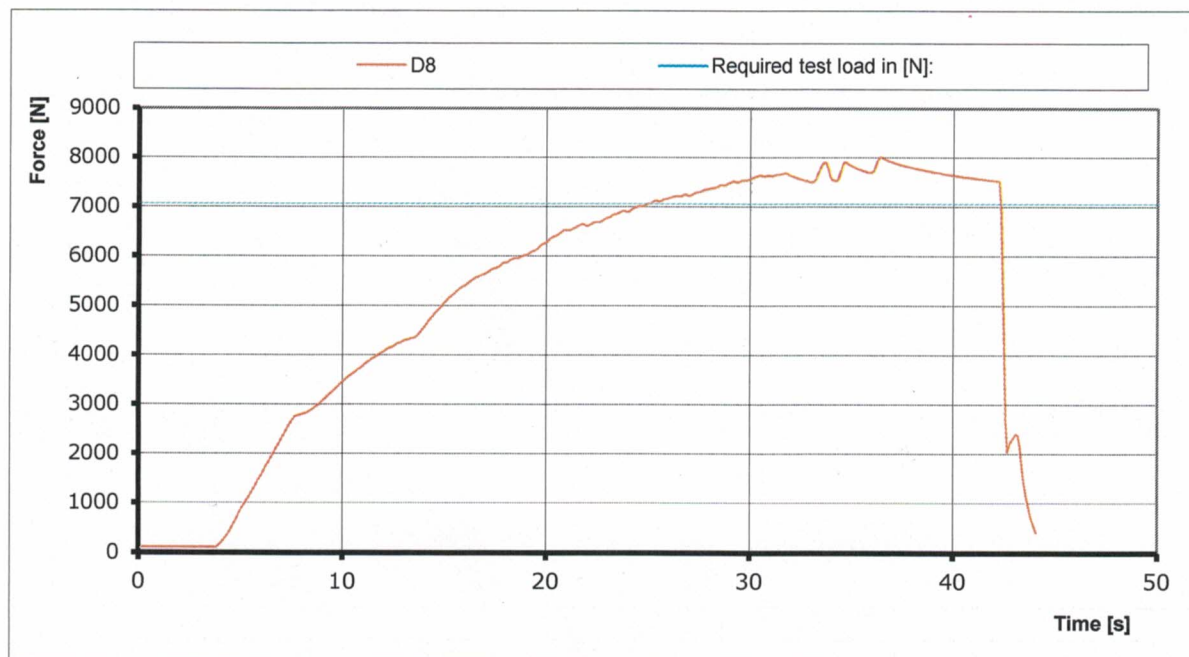

Instruments	Validity calibration	Manufacturer	Type nr.	S/N
Load sensor	14.10.2017	HBM	1-S9M/50KN-1	31314652
Geos n°11 Skywatch	07.04.2017	JDC	Geos n° 11	0022

The validation of this test report is given by the signature of the test manager on the Inspection Certificate no 71.9.1

HARNESS STRUCTURAL STRENGTH TEST

TEST REPORT PH ID 10

PH PARAGLIDER HARNESSES

Inspection certificate number: PH_218.2018

Manufacturer name: Niviuk Gliders - Air Games

Name: Konverse 2

Max load [kg] : 120

Serial number : Konvers2-M V5

Date of test : Villeneuve, 24.10.2017

Test responsible: Alain Zoller

Directives: EN 1651:1999

Test standard §: 5.3.2.6

Test setup: Normal flying position in NEGATIF

Attachment points: ONE of the main riser attachments
attached downwards(3 or 4);


Dummy: Dummy anchored at the head position
(9)

Required load in force [g] : 4.5

Model max load [kg]: 120

Required test load in [N]: 5297

Min. duration [s]: 10



Results

Duration of maintained min. load [s]: 18.23

[C°] 23.9


Any signs of structural failure after this test: no failure

RH [%] 48

Test result: POSITIVE

[hPa] 1028.7

Graph: D10

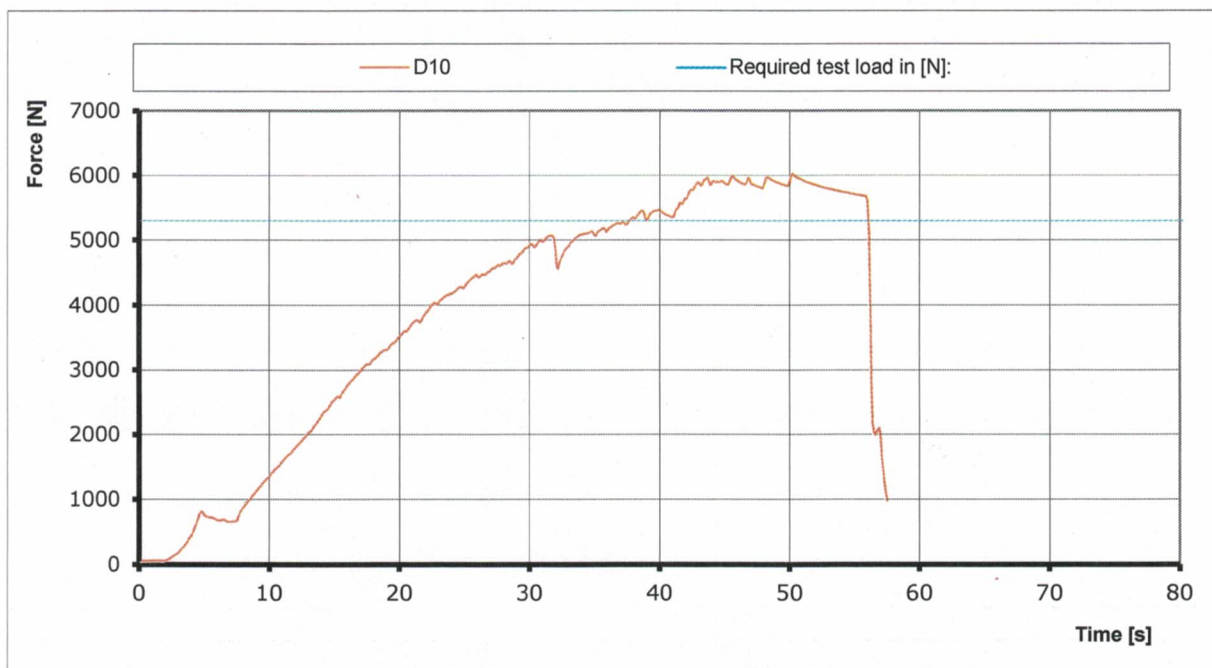

Instruments	Validity calibration	Manufacturer	Type nr.	S/N
Load sensor	14.10.2017	HBM	1-S9M/50KN-1	31314652
Geos n°11 Skywatc	07.04.2017	JDC	Geos n° 11	0022

The validation of this test report is given by the signature of the test manager on the Inspection Certificate no 71.9.1

HARNESS STRUCTURAL STRENGTH TEST

TEST REPORT PH **RRDT**

PH PARAGLIDER HARNESSES

Inspection certificate number: **PH_218.2018**

Manufacturer name: **Niviuk Gliders - Air Games**

Name: **Konverse 2**

Max load [kg] : **120**

Serial number : **Konvers2-M V5**

Date of test : **Villeneuve, 17.01.2018**

Test responsible: **Alain Zoller**

Directives: **Nfl II 91 / 09**

Test standard §: **6.1.5**

The deployment of the rescue system has to be ensured in all circumstances, especially with a damaged glider.

The pilot has to be able to deploy the rescue chute with a single pull out of the outer container, single handed and in an anatomical favorable direction.

In order to simulate this, the test responsible deploys the rescue seated in the harness. In a similar way as in real flight. The deployment resistance is approximately measured by the load cell, which is placed between the hand of the test responsible and the rescue hand grip.

On the other hand inadvertent deployment has to be fairly remote. Therefore a shear link has to withstand a minimum load.

Requirements [kN]: **0.07**

Min force to prevent unwanted opening [kN]: **0.02**

Measured peak to peak required force for deployment [kN]:

Test result 20 [N]: **POSITIVE**


[C°] **21**

Test result 70 [N]: **POSITIVE**

RH [%] **37**

Graph: **RRDT**

[hPa] **1012.7**

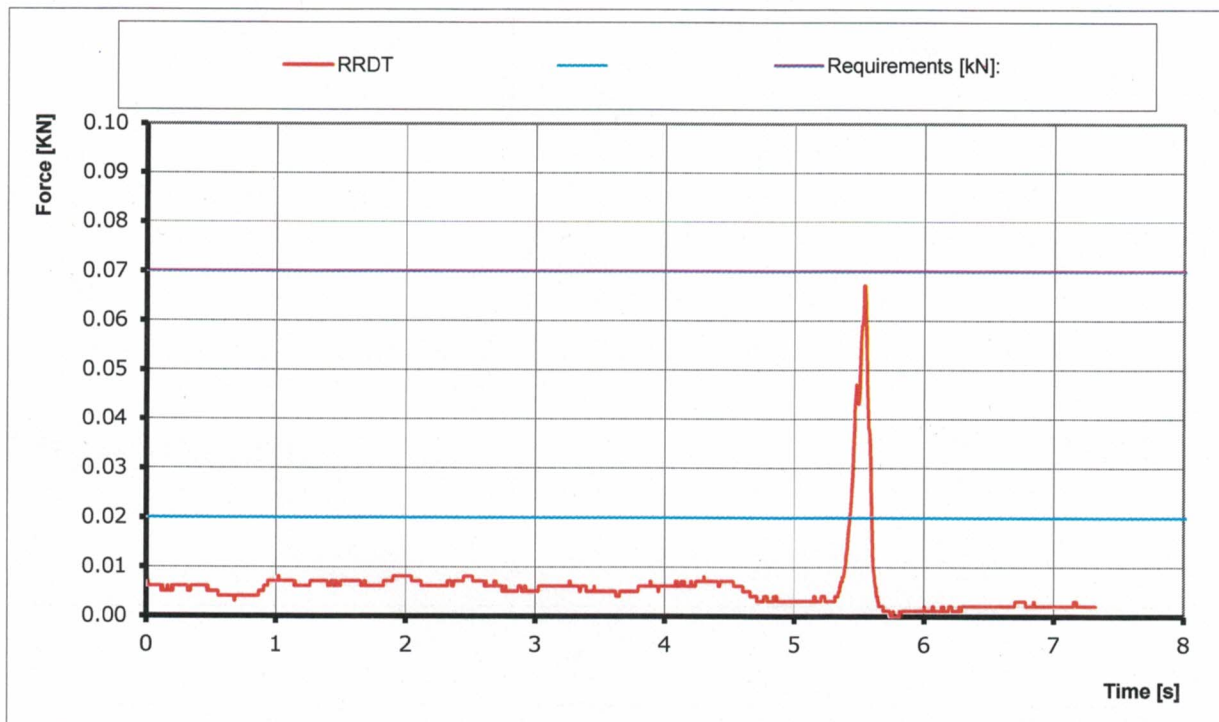

Instruments	Validity calibration	Manufacturer	Type nr.	S/N
Load Cell (axial)	11.06.2016	Burster / MTS	1-S9M/50KN-1	8431-10000
Geos n°11 Skywatch	07.04.2017	JDC	Geos n° 11	0022

The validation of this test report is given by the signature of the test manager on the Inspection Certificate no 71.9.1

HARNESS STRUCTURAL STRENGTH TEST

TEST REPORT PH **RRST**

PH PARAGLIDER HARNESSSES

Inspection certificate number: **PH_218.2018**

Manufacturer name: **Niviuk Gliders - Air Games**

Name: **Konverse 2**

Max load [kg] : **120**

Serial number : **Konvers2-M V5**

Date of test : **Villeneuve, 17.01.2018**

Test responsible: **Alain Zoller**

Directives: EN 12491:2001 & Nfi II 91 / 09

Test standard §: 5.3.2 (EN) & 6.1.8 (LTF)

Test setup: The handgrip of the outer container has to be connected to the inner container with a removable loop in a way that it is possible to use the inner container with different types of outer containers.

The connection between handgrip and inner container has to have sufficient load capacity/structural strength in any situation that may arise during normal operation.

In order to verify this, the connection is tested on its tensile strength by a default tensile testing setup.

In addition to this the breaking resistance will also be measured.

Requirements[kN]: **0.7**

Requirements[s]: **10**

Results

Duration of maintained load [s]: **13.91**

[C°] **21**


Calculated max value of breaking resistance [kN]: **0.90**

RH [%] **37**

Test result: **POSITIVE**

[hPa] **1012.7**

Graph: **RRST**

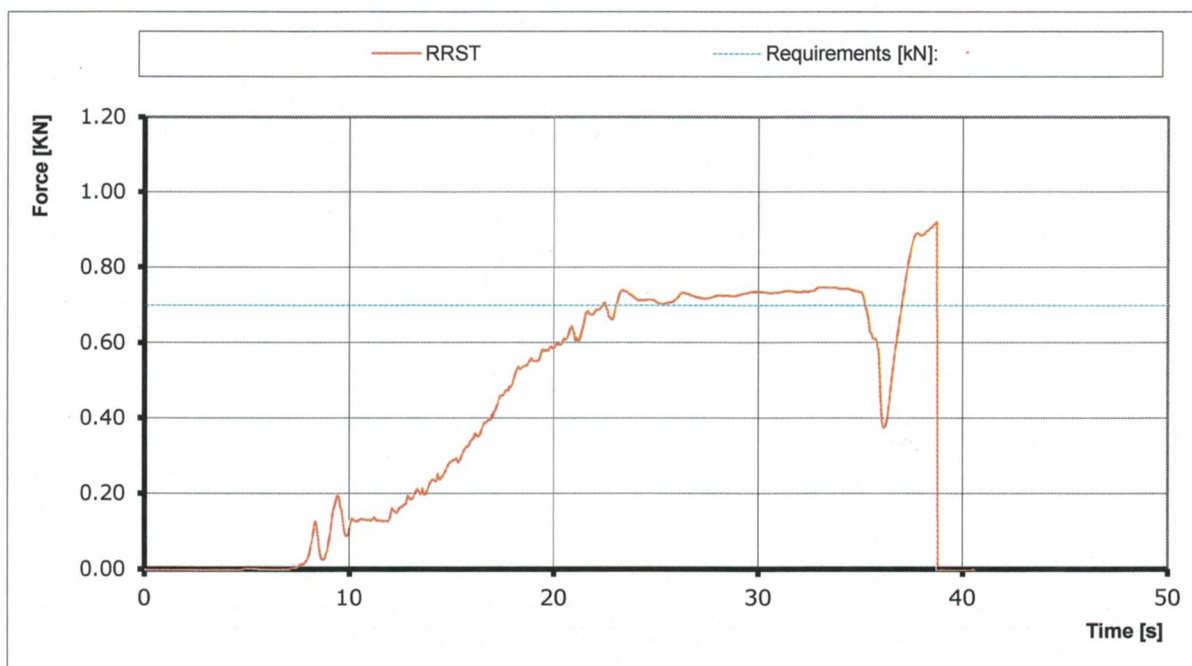

Instruments	Validity calibration	Manufacturer	Type nr.	S/N
Load Cell (axial)	11.06.2016	Burster / MTS	1-S9M/50KN-1	8431-10000
Geos n°11 Skywatch	07.04.2017	JDC	Geos n° 11	0022

The validation of this test report is given by the signature of the test manager on the Inspection Certificate no 71.9.1

PH PARAGLIDER HARNESSSES

INSPECTION CERTIFICATE

Inspection certificate number: **PH_218.2018**

MANUFACTURER DATA

Manufacturer name: **Niviuk Gliders - Air Games**
Contact person: **Dominique Cizeau**
Street: **C. Del Ter, 6-Nave D**
Post code / place: **17165 La Cellera de Ter Girona**
Country: **Spain**

SAMPLE DATA

Name: Konverse 2	Size: M
Type: ABS	Pilot max load [kg]: 120
Impact pad type: Airbag	Weight [kg]: 3.4
Serial number: Konvers2-M V5	Reception date: 24.10.2017
Volume reserve parachute container [cm3] Min: 8500	
Max: 11500	

ISSUE DATA

Place of declaration: **Villeneuve**
Date of issue: **01.03.2018**
Managing Director: **Alain Zoller**

Signature: 

This signature approve the validity of the test reports no: R0,R2,R4,R6,R8,R9,R10

Air Turquoise SA, having thoroughly assessed the sample mentioned hereunder, declare it was found conform with all requirements defined by the following norms

European Standard **EN1651** September 1999 | Test no: R0,R2,R4,R6,R8,R9,R10
Test recognized for the standard: Airworthiness Requirements LTF NFL 2009 in 91/09 chapter 4.2.1

European Standard **EN12491** September 2001 | Test no: RRDT,RRST
Test recognized for the standard: Airworthiness Requirements LTF NFL 2009 in 91/09 chapter 6.1.5 and 6.1.8

Present declaration's scope only extends to the conformity of a given sample, on a given date and in a given place – as mentioned here above.

This inspection report contain the following test and is complet with the test report:
71.9.1 | PH ID **R0,R2,R4,R6,R8,R9,R10, RRDT,RRST**

Inspection certificate number: **PH_218.2018****A. STRUCTURAL STRENGTH TESTS SUMMARY**

A test plan was set up in order to execute the different tests in an efficient order. The table below summarizes this test plan together with the applicable standards and results

Test ID	TESTED ?	Standard Ref.	TEST setup	Anchoring		Forces		Min. Test duration [sec]	Result
		EN 1651:1999		Attach -ment points	Dummy	Req. Load in [g] force	Min. force [N]		
R0	✓	5.3.2.1	Default flying position	2 main attachment points	Hip fixated	6	6000	10	POSITIVE
R2	✓	5.3.2.2				15	15000	5	POSITIVE
R4	✓	5.3.2.7	Flying position before landing	Main risers attachments	landing conf.	15	15000	5	POSITIVE
R6	✓	5.3.2.4	Rescue attachments	Rescue riser attachments	Hip fixed	15	15000	5	POSITIVE
R8	✓	5.3.2.3	One riser	ONE main att.	1 central hip fixation	6	6000	10	POSITIVE
R9		5.3.2.5	Towing	2 main att. + 2 tow att.		3	3000	10	n/a
					None	5	5000		
R10	✓	5.3.2.6	Default, Negatif	One main att.	Head fix.	4.5	4500	10	POSITIVE

B. RESCUE DEPLOYMENT RESISTANCE TEST SUMMARY

The deployment of the rescue system has to be ensured in all circumstances of flight. This test is to verify whether the force needed to deploy is in between reasonable limits

Test ID	TESTED ?	Standard Ref.	TEST setup	Anchoring		Force for single hand deployment		Result
		EN 12491:2001		Attachment points	Dummy	Min.	Resistance measured [N]	
						Max.		
						[N]		
RRDT	✓	6.1.5	Default flying position	Test sample is attached to the dummy like a pilot in flight.		20	50.0	POSITIVE
				(no dummy required)		70		POSITIVE

C. RESCUE DEPLOYMENT STRAP STRENGTH TEST SUMMARY

The connection between handgrip and inner container has to have sufficient load capacity/structural strength in any situation that may arise during normal use. During this test is verified, whether this connection fulfill the requirements

Test ID	TESTED ?	Standard Ref.	TEST setup	Minimum force [N]	Min.	Breaking resistance measured [N]	Result
		EN 12491:2001			Test duration [s]		
RRST	✓	5.3.2	Connection strap in tensile testing machine	700	10	902.0	POSITIVE

Calculated value in tests reports include the value minus the uncertainty (on safe side) / The uncertainty stated is the expanded uncertainty obtained by multiplying the standard uncertainty by the coverage factor $k = 2$. The value of the measurand lies within the assigned range of values with a probability of 95%.

This declaration must not be reproduced in part without the written permission of AIR TURQUOISE SA.

HARNESS STRUCTURAL STRENGTH TEST

TEST REPORT PH ID 0

PH PARAGLIDER HARNESSES

Inspection certificate number: **PH_218.2018**

Manufacturer name: **Niviuk Gliders - Air Games**

Name: **Konverse 2**

Max load [kg] : **120**

Serial number : **Konvers2-M V5**

Place and date of test : **Villeneuve, 24.10.2017**

Test responsible: **Alain Zoller**

Directives: **EN 1651:1999**

Test standard §: **5.3.2.1**

Test setup: **Default flying position**

Attachment points: **Both main riser attachments (3, 4)**


Dummy: **Default, hip fixed (7, 8)**

Required load in force [g] : **6**

Model max load [kg]: **120**

Required test load in [N]: **7063**

Min. duration test load [s]: **10**



Results

Duration of maintained min. load [s]: **14.70**

[C°] **23.9**


Any signs of structural failure after this test: **no failure**

RH [%] **48**

Test result: **POSITIVE**

[hPa] **1028.7**

Graph: **D0**

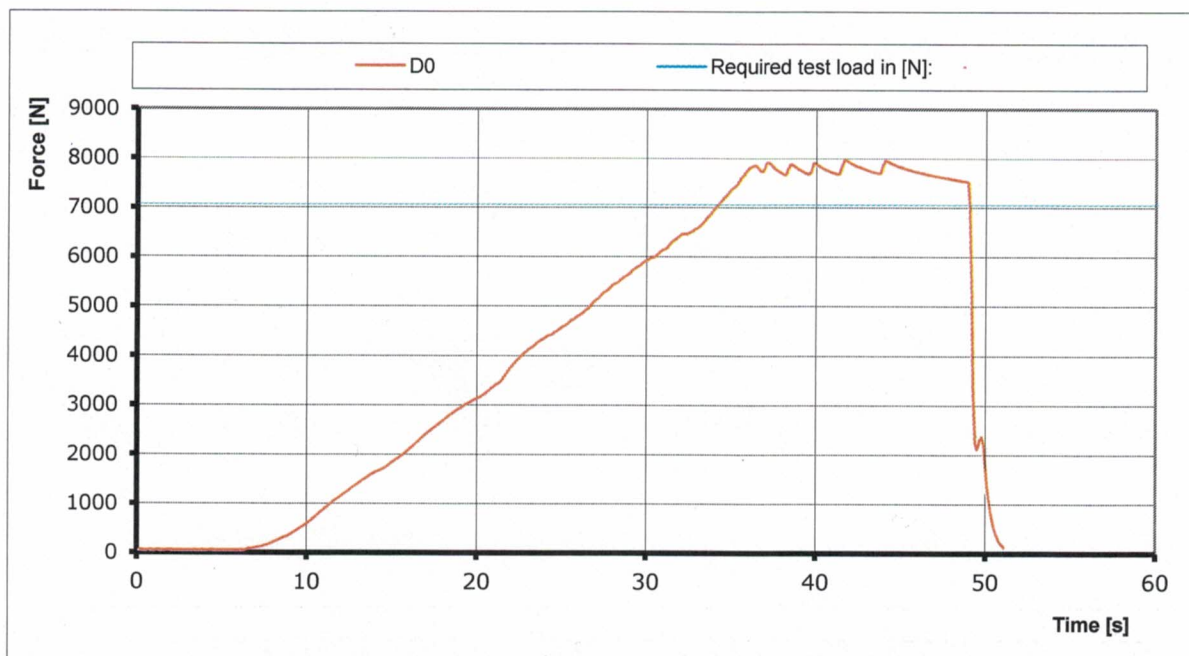

Instruments	Validity calibration	Manufacturer	Type nr.	S/N
Load sensor	14.10.2017	HBM	1-S9M/50KN-1	31314652
Geos n°11 Skywatch	07.04.2017	JDC	Geos n° 11	0022

The validation of this test report is given by the signature of the test manager on the Inspection Certificate no 71.9.1

HARNESS STRUCTURAL STRENGTH TEST

TEST REPORT PH ID 2

PH PARAGLIDER HARNESSES

Inspection certificate number: **PH_218.2018**

Manufacturer name: **Niviuk Gliders - Air Games**

Name: **Konverse 2**

Max load [kg] : **120**

Serial number : **Konvers2-M V5**

Date of test : **Villeneuve, 24.10.2017**

Test responsible: **Alain Zoller**

Directives: **EN 1651:1999**

Test standard §: **5.3.2.2**

Test setup: **Default flying position**

Attachment points: **Both main riser attachments (3, 4)**


Dummy: **Default, hip fixed (7, 8)**

Required load in force [g] : **15**

Model max load [kg]: **120**

Required test load in [N]: **17658**

Min. duration [s]: **5**



Results

Duration of maintained min. load [s]: **10.65**

[C°] **23.9**


Any signs of structural failure after this test: **no failure**

RH [%] **48**

Test result: **POSITIVE**

[hPa] **1028.7**

Graph: **D2**

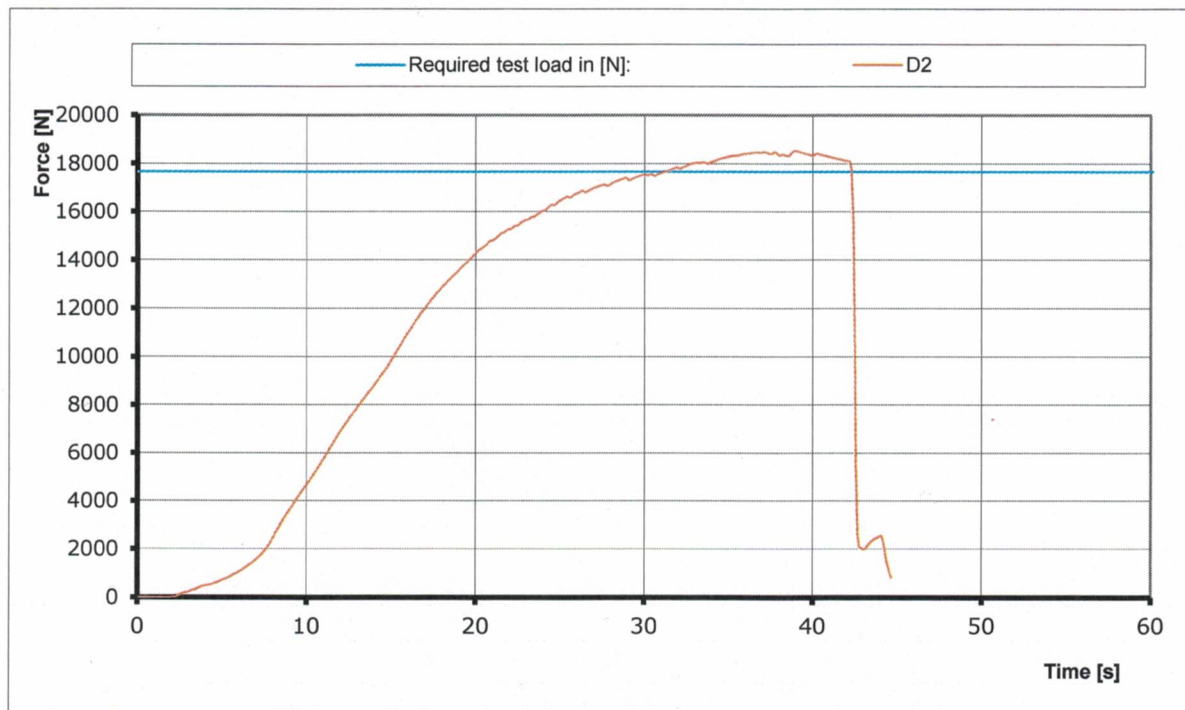

Instruments	Validity calibration	Manufacturer	Type nr.	S/N
Load sensor	14.10.2017	HBM	1-S9M/50KN-1	31314652
Geos n°11 Skywac	07.04.2017	JDC	Geos n° 11	0022

The validation of this test report is given by the signature of the test manager on the Inspection Certificate no 71.9.1

HARNESS STRUCTURAL STRENGTH TEST

TEST REPORT PH ID 4

PH PARAGLIDER HARNESSSES

Inspection certificate number: PH_218.2018

Manufacturer name: Niviuk Gliders - Air Games

Name: Konverse 2

Max load [kg]: 120

Serial number: Konvers2-M V5

Date of test: Villeneuve, 15.12.2017

Test responsible: Alain Zoller

Directives: EN 1651:1999

Test standard §: EN 5.3.2.7

Flying position before landing: seat

Test setup: board (11) in landing position, leg straps (10) closed.

Attachment points: Both of the main riser attachments attached (3 and 4);


Dummy: Default, hip fixed (7, 8)

Required load in force [g]: 15

Model max load [kg]: 120

Required test load in [N]: 17658

Min. duration [s]: 5



Results

Duration of maintained min. load [s]: 7.55

[C°] 21.2


Any signs of structural failure after this test: no failure

RH [%] 34

Test result: **POSITIVE**

[hPa] 1003.3

Graph: D4

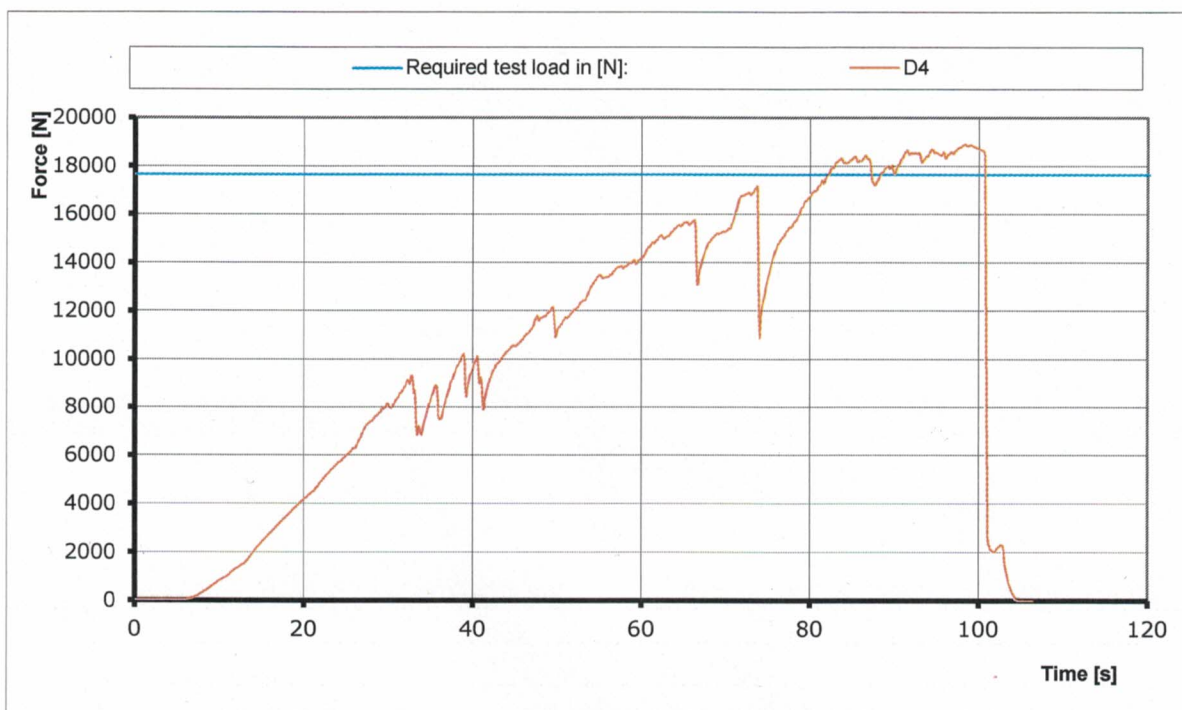

Instruments	Validity calibration	Manufacturer	Type nr.	S/N
Load sensor	14.10.2017	HBM	1-S9M/50KN-1	31314652
Geos n°11 Skywatch	07.04.2017	JDC	Geos n° 11	0022

The validation of this test report is given by the signature of the test manager on the Inspection Certificate no 71.9.1

HARNESS STRUCTURAL STRENGTH TEST

TEST REPORT PH ID 6

PH PARAGLIDER HARNESSSES

Inspection certificate number: PH_218.2018

Manufacturer name: Niviuk Gliders - Air Games

Name: Konverse 2

Max load [kg] : 120

Serial number : Konvers2-M V5

Date of test : Villeneuve, 15.12.2017

Test responsible: Alain Zoller

Directives: EN 1651:1999

Test standard §: 5.3.2.4

Test setup: Rescue attachments

Attachment points: Rescue riser attachments (1,2)


Dummy: Hip fixed (7, 8)

Required load in force [g] : 15

Model max load [kg]: 120

Required test load in [N]: 17658

Min. duration [s]: 5



Results

Duration of maintained min. load [s]: 10.95

[C°] 21.2


Any signs of structural failure after this test: no failure

RH [%] 34

Test result: **POSITIVE**

[hPa] 1003.3

Graph: D6

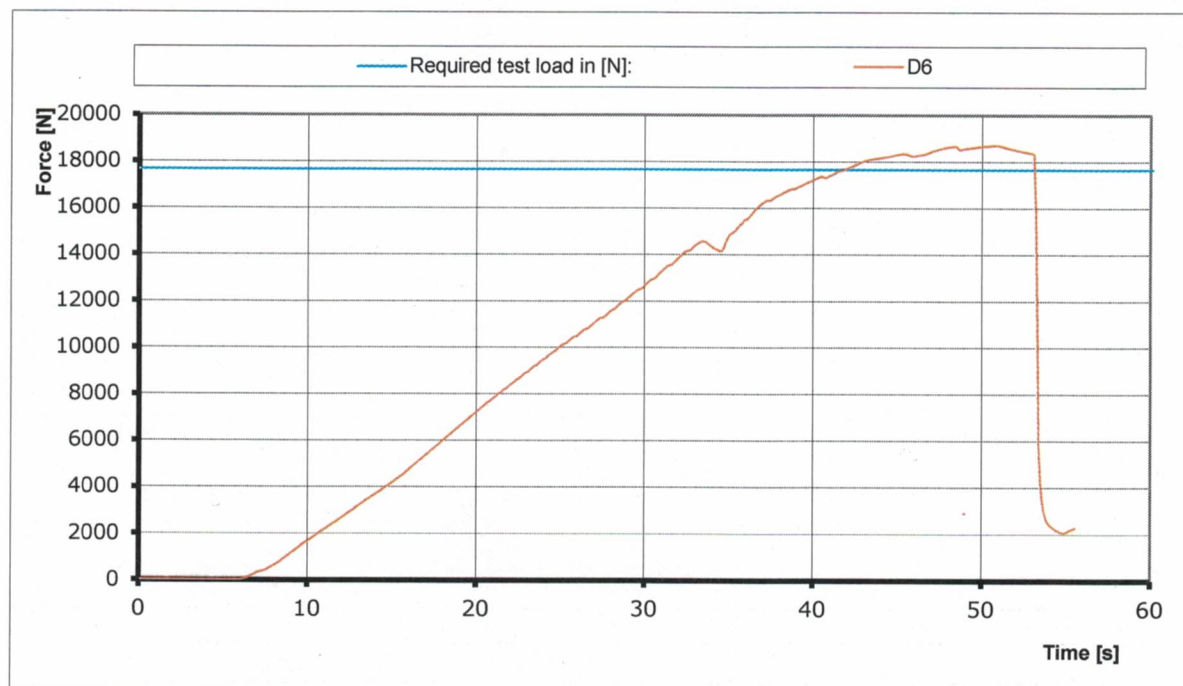

Instruments	Validity calibration	Manufacturer	Type nr.	S/N
Load sensor	14.10.2017	HBM	1-S9M/50KN-1	31314652
Geos n°11 Skywate	07.04.2017	JDC	Geos n° 11	0022

The validation of this test report is given by the signature of the test manager on the Inspection Certificate no 71.9.1

HARNESS STRUCTURAL STRENGTH TEST

TEST REPORT PH ID 8

PH PARAGLIDER HARNESSES

Inspection certificate number: **PH_218.2018**

Manufacturer name: **Niviuk Gliders - Air Games**

Name: **Konverse 2**

Max load [kg] : **120**

Serial number : **Konvers2-M V5**

Date of test : **Villeneuve, 24.10.2017**

Test responsible: **Alain Zoller**

Directives: **EN 1651:1999**

Test standard §: **5.3.2.3**

Test setup: **Only one riser attached**

Attachment points: **One main riser attachments (3)**


Dummy: **Hip fixed (7, 8 -> 12)**

Required load in force [g] : **6**

Model max load [kg]: **120**

Required test load in [N]: **7063**

Min. duration [s]: **10**



Results

Duration of maintained min. load [s]: **17.04**

[C°] **23.9**


Any signs of structural failure after this test: **no failure**

RH [%] **48**

Test result: **POSITIVE**

[hPa] **1028.7**

Graph: **D8**

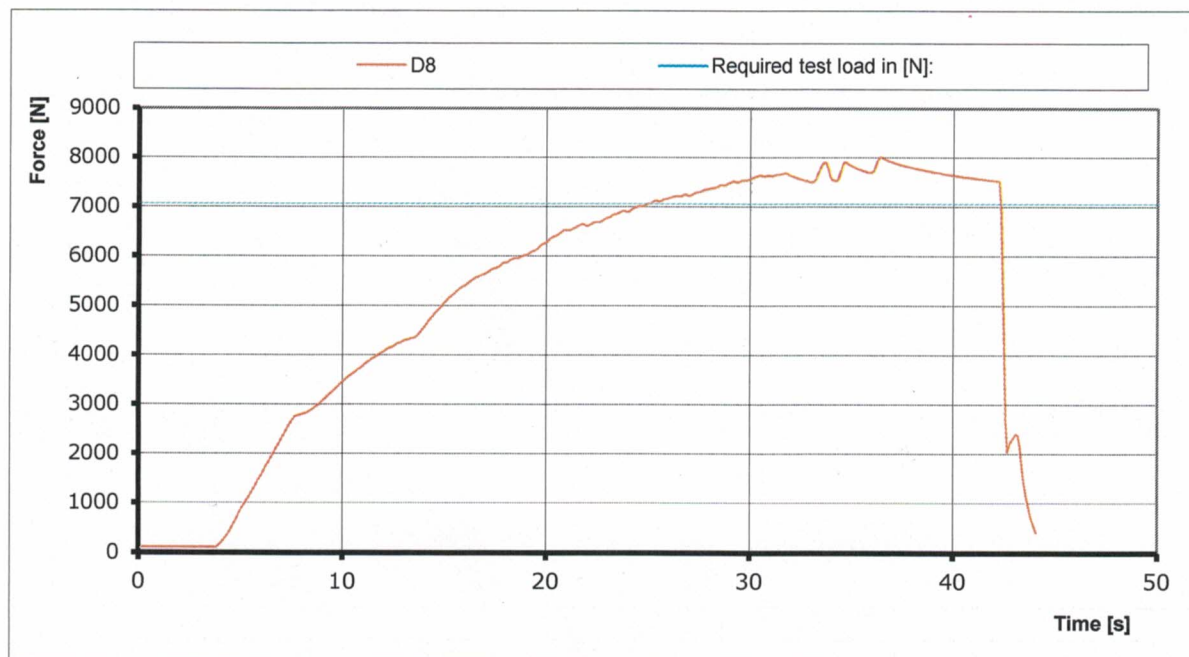

Instruments	Validity calibration	Manufacturer	Type nr.	S/N
Load sensor	14.10.2017	HBM	1-S9M/50KN-1	31314652
Geos n°11 Skywatch	07.04.2017	JDC	Geos n° 11	0022

The validation of this test report is given by the signature of the test manager on the Inspection Certificate no 71.9.1

HARNESS STRUCTURAL STRENGTH TEST

TEST REPORT PH ID 10

PH PARAGLIDER HARNESSES

Inspection certificate number: PH_218.2018

Manufacturer name: Niviuk Gliders - Air Games

Name: Konverse 2

Max load [kg] : 120

Serial number : Konvers2-M V5

Date of test : Villeneuve, 24.10.2017

Test responsible: Alain Zoller

Directives: EN 1651:1999

Test standard §: 5.3.2.6

Test setup: Normal flying position in NEGATIF

Attachment points: ONE of the main riser attachments
attached downwards(3 or 4);


Dummy: Dummy anchored at the head position
(9)

Required load in force [g] : 4.5

Model max load [kg]: 120

Required test load in [N]: 5297

Min. duration [s]: 10



Results

Duration of maintained min. load [s]: 18.23

[C°] 23.9


Any signs of structural failure after this test: no failure

RH [%] 48

Test result: POSITIVE

[hPa] 1028.7

Graph: D10

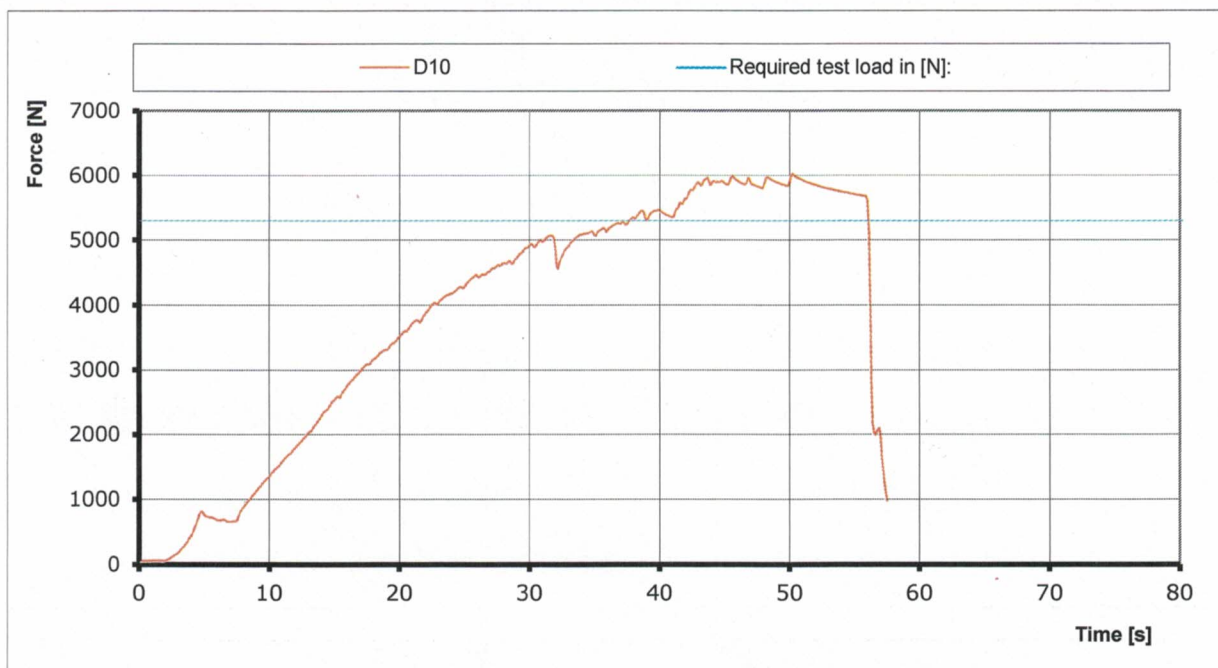

Instruments	Validity calibration	Manufacturer	Type nr.	S/N
Load sensor	14.10.2017	HBM	1-S9M/50KN-1	31314652
Geos n°11 Skywatc	07.04.2017	JDC	Geos n° 11	0022

The validation of this test report is given by the signature of the test manager on the Inspection Certificate no 71.9.1

HARNESS STRUCTURAL STRENGTH TEST

TEST REPORT PH **RRDT**

PH PARAGLIDER HARNESSES

Inspection certificate number: **PH_218.2018**

Manufacturer name: **Niviuk Gliders - Air Games**

Name: **Konverse 2**

Max load [kg] : **120**

Serial number : **Konvers2-M V5**

Date of test : **Villeneuve, 17.01.2018**

Test responsible: **Alain Zoller**

Directives: **Nfl II 91 / 09**

Test standard §: **6.1.5**

The deployment of the rescue system has to be ensured in all circumstances, especially with a damaged glider.

The pilot has to be able to deploy the rescue chute with a single pull out of the outer container, single handed and in an anatomical favorable direction.

In order to simulate this, the test responsible deploys the rescue seated in the harness. In a similar way as in real flight. The deployment resistance is approximately measured by the load cell, which is placed between the hand of the test responsible and the rescue hand grip.

On the other hand inadvertent deployment has to be fairly remote. Therefore a shear link has to withstand a minimum load.

Requirements [kN]: **0.07**

Min force to prevent unwanted opening [kN]: **0.02**

Measured peak to peak required force for deployment [kN]:

Test result 20 [N]: **POSITIVE**


[C°] **21**

Test result 70 [N]: **POSITIVE**

RH [%] **37**

Graph: **RRDT**

[hPa] **1012.7**

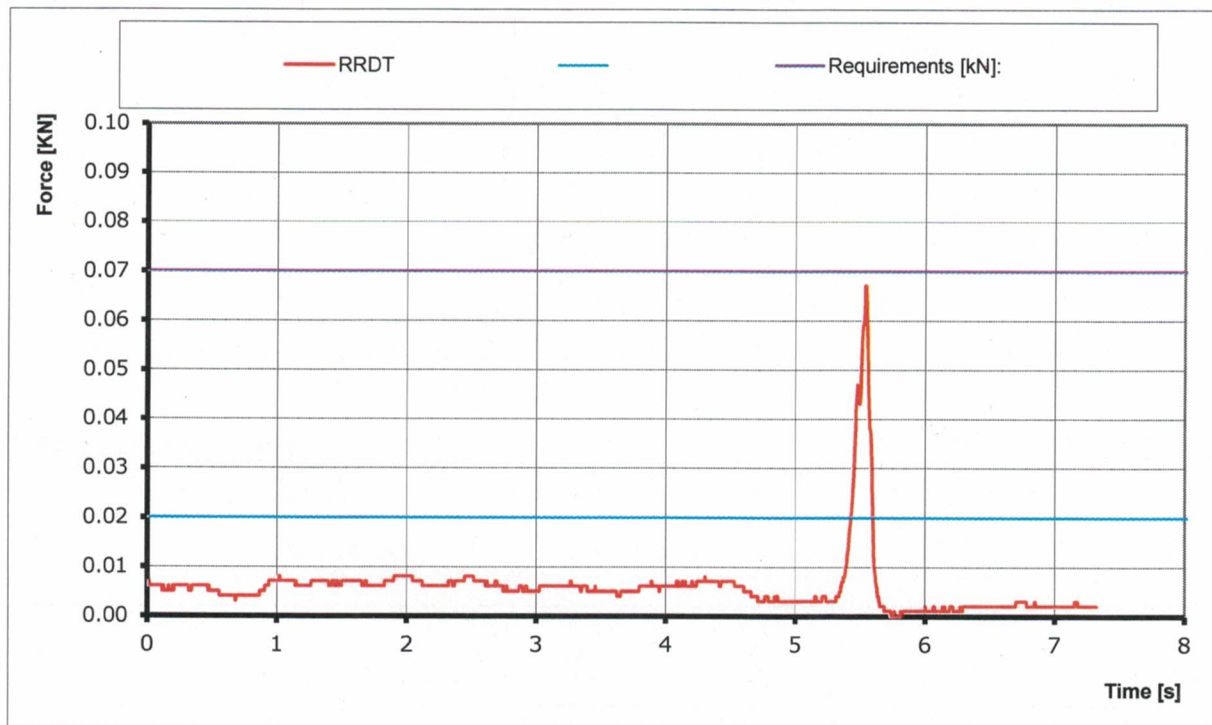

Instruments	Validity calibration	Manufacturer	Type nr.	S/N
Load Cell (axial)	11.06.2016	Burster / MTS	1-S9M/50KN-1	8431-10000
Geos n°11 Skywatch	07.04.2017	JDC	Geos n° 11	0022

The validation of this test report is given by the signature of the test manager on the Inspection Certificate no 71.9.1

HARNESS STRUCTURAL STRENGTH TEST

TEST REPORT PH **RRST**

PH PARAGLIDER HARNESSSES

Inspection certificate number: **PH_218.2018**

Manufacturer name: **Niviuk Gliders - Air Games**

Name: **Konverse 2**

Max load [kg] : **120**

Serial number : **Konvers2-M V5**

Date of test : **Villeneuve, 17.01.2018**

Test responsible: **Alain Zoller**

Directives: EN 12491:2001 & Nfi II 91 / 09

Test standard §: 5.3.2 (EN) & 6.1.8 (LTF)

Test setup: The handgrip of the outer container has to be connected to the inner container with a removable loop in a way that it is possible to use the inner container with different types of outer containers.

The connection between handgrip and inner container has to have sufficient load capacity/structural strength in any situation that may arise during normal operation.

In order to verify this, the connection is tested on its tensile strength by a default tensile testing setup.

In addition to this the breaking resistance will also be measured.

Requirements[kN]: **0.7**

Requirements[s]: **10**

Results

Duration of maintained load [s]: **13.91**

[C°] **21**


Calculated max value of breaking resistance [kN]: **0.90**

RH [%] **37**

Test result: **POSITIVE**

[hPa] **1012.7**

Graph: **RRST**

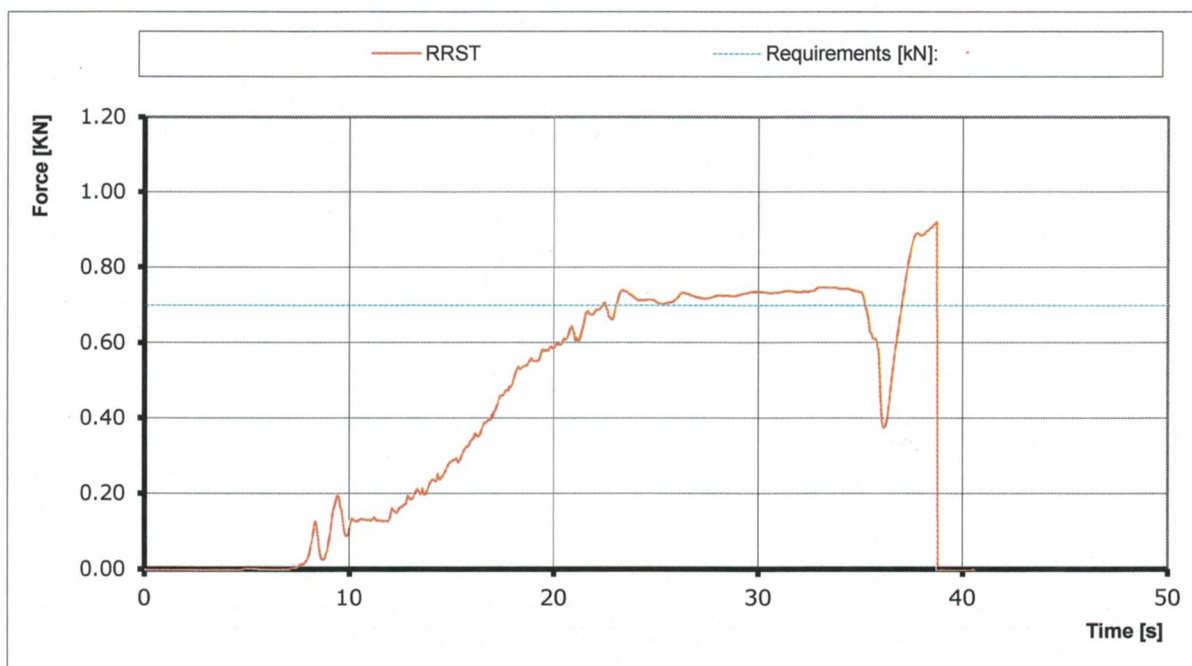

Instruments	Validity calibration	Manufacturer	Type nr.	S/N
Load Cell (axial)	11.06.2016	Burster / MTS	1-S9M/50KN-1	8431-10000
Geos n°11 Skywatch	07.04.2017	JDC	Geos n° 11	0022

The validation of this test report is given by the signature of the test manager on the Inspection Certificate no 71.9.1